

## Description

The APX823/APX824/APX825A family of supervisors provides circuit initialization and timing supervision, primarily for DSP and processor-based systems.

During power-on,  $\overline{\text{RESET}}$  is asserted when supply voltage  $V_{CC}$  becomes higher than 1.1V. Thereafter, the supply voltage supervisor monitors  $V_{CC}$  and keeps  $\overline{\text{RESET}}$  active as long as  $V_{CC}$  remains below the threshold voltage  $V_{TH}$ . An internal timer delays the return of the output to the inactive state (high) to ensure proper system reset. The delay time,  $t_d$  starts after  $V_{CC}$  has risen above the threshold voltage  $V_{TH}$ . When the supply voltage drops below the threshold voltage  $V_{TH}$ , the output becomes active (low) again. No external components are required. All the devices of this family have a fixed-sense threshold voltage  $V_{TH}$  set by an internal voltage divider.

The APX823/APX825A devices incorporate a manual reset input,  $\overline{\text{MR}}$ . A low level at  $\overline{\text{MR}}$  causes  $\overline{\text{RESET}}$  to become active. The APX824/APX825A devices include a high-level output  $\overline{\text{RESET}}$ . APX823/APX824/APX825A have a watchdog timer that is periodically triggered by a positive or negative transition at WDI. When the supervising system fails to retrigger the watchdog circuit within the time-out interval,  $t_{out}$ ,  $\overline{\text{RESET}}$  becomes active for the time period  $t_d$ . This event also reinitializes the watchdog timer. Leaving WDI unconnected disables the watchdog.




In applications where the input to the WDI pin may be active (transitioning high and low) when the APX823/APX824/APX825A asserting  $\overline{\text{RESET}}$  the APX823/APX824/APX825A does not return to a non-reset state when the input voltage is above  $V_t$ . The product spectrum is designed for supply voltage of 2.5V, 3V, 3.3V and 5V. The circuits are available in a SOT25 and SOT26 packages. The APX823/APX824/APX825A devices are characterized for operation over a temperature range of -40°C to 105°C.

## Features

- Power-on reset generator with fixed delay time of 200ms Typ
- Manual reset input (APX823/APX825A)
- Reset output available in active-low (APX823/APX824/APX825A), active-high (APX824/APX825A)
- Supply voltage supervision range 2.5V, 3V, 3.3V, 5V
- Watchdog timer
- Supply current of 30µA (Typ.)
- Temperature range: -40°C to 85°C
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](https://www.diodes.com/contact-us) or your local Diodes representative. <https://www.diodes.com/quality/product-definitions/>**

Notes: 1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.  
 2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.  
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


## Pin Assignments

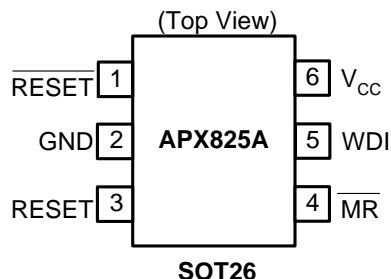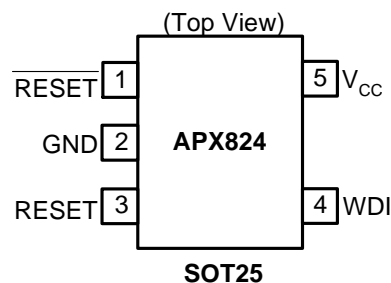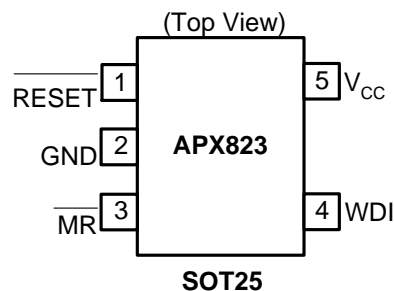

## Applications

- Applications using DSPs, microcontrollers, or microprocessors
- Industrial equipment
- Programmable controls
- Portable/battery-powered equipment
- Intelligent instruments
- Wireless communications systems
- Notebook/desktop computers


**Typical Application Circuit**

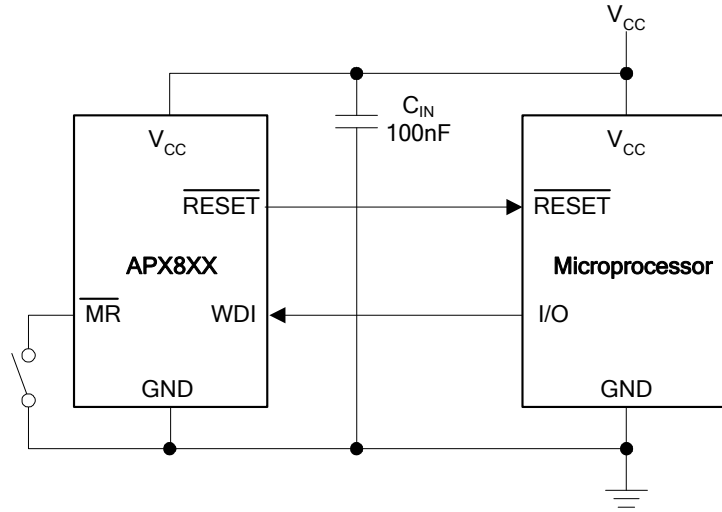

**Pin Descriptions**

| Pin Name        | Description             |
|-----------------|-------------------------|
| GND             | Ground                  |
| RESET (RESET)   | Reset output pin        |
| V <sub>CC</sub> | Operating voltage input |
| WDI             | Watchdog input          |
| MR              | Manual reset            |

**Functional Block Diagram**

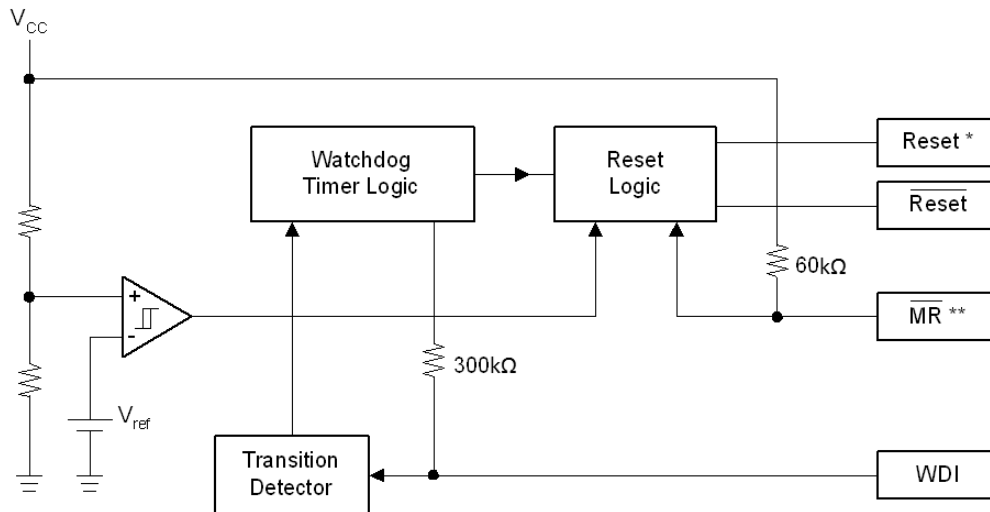

\* APX824/APX825A  
\*\* APX823/APX825A

### Absolute Maximum Ratings (Over operating ambient temperature range, unless otherwise noted)\*

| Symbol             | Parameter                                  |  | Rating                         | Unit |       |
|--------------------|--|--|--------------------------------|------|-------|
| ESD HBM            | Human Body Model ESD Protection            |  | 5                              | KV   |       |
| ESD MM             | Machine Model ESD Protection               |  | 200                            | V    |       |
| V <sub>CC</sub>    | Supply Voltage                             |  | 6.0                            | V    |       |
| V <sub>RESET</sub> | RESET, $\overline{\text{RESET}}$ , MR, WDI |  | -0.3 to (V <sub>CC</sub> +0.3) | V    |       |
| I <sub>CC</sub>    | Input Current V <sub>CC</sub>              |  | 20                             | mA   |       |
| I <sub>O</sub>     | Maximum High Output Current                |  | 20                             | mA   |       |
| P <sub>D</sub>     | Continuous Total Power Dissipation         | Derating Factor Above<br>T <sub>A</sub> = 25°C | SOT25                          | 6.2  | mW/°C |
|                    |  |  | SOT26                          | 5.8  |       |
|                    |  | T <sub>A</sub> = 25°C Power Rating             | SOT25                          | 500  | mW    |
|                    |  |  | SOT26                          | 470  |       |
|                    |  | T <sub>A</sub> = 70°C Power Rating             | SOT25                          | 220  | mW    |
|                    |  |  | SOT26                          | 210  |       |
|                    |  | T <sub>A</sub> = 85°C Power Rating             | SOT25                          | 125  | mW    |
|                    |  |  | SOT26                          | 120  |       |
| T <sub>OP</sub>    | Operating Junction Temperature Range       |  | -40 to 105                     | °C   |       |
| T <sub>ST</sub>    | Storage Temperature Range                  |  | -65 to 150                     | °C   |       |

\* Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### Recommended Operating Conditions

| Symbol          | Parameter  | Min                   | Max                    | Unit  |
|-----------------|--|-----------------------|------------------------|-------|
| V <sub>CC</sub> | Supply Voltage                                       | 1.1                   | 5.5                    | V     |
| V <sub>IN</sub> | Input Voltage  | 0                     | (V <sub>CC</sub> +0.3) | V     |
| V <sub>IH</sub> | High-level Input Voltage at MR and WDI               | 0.7 × V <sub>CC</sub> | -                      | V     |
| V <sub>IL</sub> | Low-level Voltage                                    | -                     | 0.3 × V <sub>CC</sub>  | V     |
| Δt/ΔV           | Input Transition Rise and Fall Rate at MR or WDI     | -                     | 100                    | ns/V  |
| T <sub>A</sub>  | Operating Ambient Temperature Range                  | -40                   | 85                     | °C    |
| T <sub>R</sub>  | V <sub>CC</sub> Rising Time (V <sub>CC</sub> = 0~VT) | -                     | 100                    | V/ μS |

**Electrical Characteristics** (Over recommended operating ambient temperature range, unless otherwise noted)

| Symbol                       | Parameter   |                            | Test Conditions                                  | Min  | Typ.                  | Max  | Unit |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|------------------------------|---|----------------------------|--|--|-----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------------------------------|------|------|------|
| V <sub>OH</sub>              | High-level Output Voltage                           | RESET                      | APX823/APX824/APX825A - 29/26/23                 | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OH</sub> =-20μA  | 0.8×V <sub>CC</sub>   | -    | -    | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX823/APX824/APX825A - 40/31                    | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OH</sub> =-30μA  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX823/APX824/APX825A - 46/44                    | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OH</sub> =-120μA | V <sub>CC</sub> -1.5V | -    | -    | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | RESET                      | APX824/APX825A - 29/26/23                        | V <sub>CC</sub> ≥ 1.8V,<br>I <sub>OH</sub> = -100μA                | 0.8×V <sub>CC</sub>   | -    | -    | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
| APX824/APX825A - 46/44/40/31 | V <sub>CC</sub> ≥ 1.8V,<br>I <sub>OH</sub> = -150μA |                            |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
| V <sub>OL</sub>              | Low-level Output Voltage                            | RESET                      | APX824/APX825A - 29/26/23                        | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OL</sub> =1mA    | -                     | -    | 0.4  | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX824/APX825A - 40/31                           | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OL</sub> =1.2mA  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX824/APX825A - 46/44                           | V <sub>CC</sub> = V <sub>TH</sub> +0.2V<br>I <sub>OL</sub> =3mA    |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | RESET                      | APX823/APX824/APX825A - 29/26/23                 | V <sub>CC</sub> = V <sub>TH</sub> -0.2V<br>I <sub>OL</sub> =1mA    | -                     | -    | 0.4  | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX823/APX824/APX825A - 40/31                    | V <sub>CC</sub> = V <sub>TH</sub> -0.2V<br>I <sub>OL</sub> =1.2mA  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            | APX823/APX824/APX825A - 46/44                    | V <sub>CC</sub> = V <sub>TH</sub> -0.2V<br>I <sub>OL</sub> =3mA    |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
| V <sub>RESET</sub>           | Power-up Reset Voltage (Note 4)                     |                            | V <sub>CC</sub> ≥ 1.1V,<br>I <sub>OL</sub> =20μA | -  | -                     | 0.4  | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
| V <sub>TH-</sub>             | Negative-going Input Threshold Voltage (Note 5)     | APX823/APX824/APX825A - 23 |  | T <sub>A</sub> = 0°C -85°C   | 2.21                  | 2.25 | 2.30 | V    |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 26 |  |  |                       |      |      |      | 2.59 | 2.63 | 2.69 |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 29 |  |  |                       |      |      |      |      |      |      | 2.88 | 2.93 | 3.00 |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 31 |  |  |                       |      |      |      |      |      |      |      |      |      | 3.02 | 3.08 | 3.15 |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 40 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      | 3.93 | 4.00 | 4.08 |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 44 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 4.31 | 4.38 | 4.47                         |      |      |      |
|                              |   | APX823/APX824/APX825A - 46 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              | 4.56 | 4.63 | 4.72 |
|                              |   | APX823/APX824/APX825A - 23 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 26 |  | 2.51   | 2.63                  | 2.74 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 29 |  |  |                       |      | 2.80 |      | 2.93 | 3.05 |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 31 |  |  |                       |      |      |      |      |      | 2.94 | 3.08 | 3.20 |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 40 |  |  |                       |      |      |      |      |      |      |      |      | 3.82 | 4.00 | 4.16 |      |      |      |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 44 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      | 4.19 | 4.38 | 4.56 |      |      |      |                              |      |      |      |
|                              |   | APX823/APX824/APX825A - 46 |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 4.43 | 4.63 | 4.82 |                              |      |      |      |
|                              |   |                            |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | T <sub>A</sub> = -40°C -85°C | 2.15 | 2.25 | 2.34 |
|                              |   |                            |  |  |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   | 2.80                       | 2.93   | 3.05   |                       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            |  |  | 2.94                  | 3.08 | 3.20 |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            |  |  |                       |      |      | 3.82 | 4.00 | 4.16 |      |      |      |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            |  |  |                       |      |      |      |      |      | 4.19 | 4.38 | 4.56 |      |      |      |      |      |      |      |      |      |                              |      |      |      |
|                              |   |                            |  |  |                       |      |      |      |      |      |      |      |      | 4.43 | 4.63 | 4.82 |      |      |      |      |      |      |                              |      |      |      |

- Notes: 4. The lowest supply voltage at which RESET becomes active. T<sub>R</sub>, V<sub>CC</sub> ≥ 15μs/V.  
5. To ensure best stability of the threshold voltage, a bypass capacitor (ceramic, 0.1μF) should be placed near the supply terminals.

**Electrical Characteristics** (continued)

| Symbol              | Parameter                                |  | Test Conditions  | Min | Typ. | Max | Unit   |
|---------------------|--|--|--|-----|------|-----|--------|
| V <sub>hys</sub>    | Hysteresis at V <sub>CC</sub> Input      | APX823/APX824/APX825A -23                                      |  | -   | 50   | -   | mV     |
|                     |  | APX823/APX824/APX825A -26                                      |  |     |      |     |        |
|                     |  | APX823/APX824/APX825A -29                                      |  |     |      |     |        |
|                     |  | APX823/APX824/APX825A -31                                      |  |     |      |     |        |
|                     |  | APX823/APX824/APX825A -40                                      |  |     |      |     |        |
|                     |  | APX823/APX824/APX825A -44                                      |  |     |      |     |        |
|                     |  | APX823/APX824/APX825A -46                                      |  |     |      |     |        |
| T <sub>S</sub>      | Set-up Time                              | V <sub>CC</sub> = V <sub>TH</sub> to (V <sub>TH</sub> - 100mV) |  |     | 20   |     | μs     |
| I <sub>IH(AV)</sub> | Average High-level Input Current         | WDI  | WDI=V <sub>CC</sub> ,<br>Time average (dc=88%)           | -   | 120  | -   | μA     |
| I <sub>IL(AV)</sub> | Average Low-level Input Current          |  | WDI=0.3V,<br>V <sub>CC</sub> =5.5V time average (dc=12%) | -   | -15  | -   | μA     |
| I <sub>IH</sub>     | High-level Input Current                 | WDI  | WDI=V <sub>CC</sub>                                      | -   | 120  | 160 | μA     |
| I <sub>IL</sub>     | Low-level Input Current                  | WDI  | WDI=0.3V,<br>V <sub>CC</sub> =5.5V                       | -   | 120  | 160 | μA     |
| I <sub>CC</sub>     | Supply Current                           | WDI and MR Unconnected, Outputs unconnected                    | V <sub>CC</sub> = V <sub>TH</sub> +0.2V                  | -   | 30   | 40  | μA     |
|                     | Internal Pull-up Resistor at MR          |  |  | -   | 60   | -   | kΩ     |
| TC                  | V <sub>OUT</sub> Temperature Coefficient |  |  |     | 50   | -   | ppm/°C |
| C <sub>i</sub>      | Input Capacitance at MR , WDI            |  | V <sub>I</sub> = 0V to 5.5V                              | -   | 5    | -   | pF     |
| θ <sub>JA</sub>     | Thermal Resistance Junction-to-Ambient   |  | SOT25 (Note 6)   |     | 161  |     | °C/W   |
|                     |  |  | SOT26 (Note 6)   |     | 169  |     |        |
| θ <sub>JC</sub>     | Thermal Resistance Junction-to-Case      |  | SOT25 (Note 6)   |     | 27   |     | °C/W   |
|                     |  |  | SOT26 (Note 6)   |     | 28   |     |        |

Note: 6. Test condition for SOT25 and SOT26: Devices mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.




### Timing Requirements (@ $R_L = 1\text{m}\Omega$ , $C_L = 50\text{pF}$ , $T_A = 25^\circ\text{C}$ )

| Symbol | Parameter   | Test Conditions            | Min  | Typ.       | Max | Unit |           |
|--------|-------------|----------------------------|--|------------|-----|------|-----------|
| $t_w$  | Pulse Width | at $\overline{\text{MR}}$  | $V_{CC} \geq \underline{V_{TH}} + 0.2\text{V}$ , $V_{IL} = 0.3 \times V_{CC}$ , $V_{IH} = 0.7 \times \underline{V_{CC}}$ | <u>100</u> | -   | -    | <u>ns</u> |
|        |             | at $\overline{\text{WDI}}$ | $V_{CC} \geq \underline{V_{TH}} + 0.2\text{V}$ , $V_{IL} = 0.3 \times V_{CC}$ , $V_{IH} = 0.7 \times V_{CC}$             | <u>50</u>  | -   | -    | ns        |





### Switching Characteristics (@ $R_L = 1\text{m}\Omega$ , $C_L = 50\text{pF}$ , $T_A = 25^\circ\text{C}$ )

| Symbol           | Parameter  | Test Conditions   | Min         | Typ. | Max        | Unit          |
|------------------|--|---|-------------|------|------------|---------------|
| $t_{\text{out}}$ | Watchdog Time Out                                  | APX823/APX824/APX825A<br>$V_{CC} \geq \underline{V_{TH}} + 0.2\text{V}$ ,<br>See timing diagram   | <u>1.12</u> | 1.6  | <u>2.4</u> | s             |
| $t_d$            | Delay Time   | APX823/APX824/APX825A<br>$V_{CC} \geq \underline{V_{TH}} + 0.2\text{V}$ ,<br>See timing diagram   | 140         | 200  | 280        | ms            |
| $t_{\text{PHL}}$ | Propagation (Delay) Time, High-to-low-level Output | $\overline{\text{MR}}$ to $\overline{\text{RESET}}$ delay (APX823/APX825A)<br>$V_{CC} > \underline{V_{TH}} + 0.2\text{V}$ ,<br>$V_{IL} = 0.3 \times V_{CC}$ ,<br>$V_{IH} = 0.7 \times V_{CC}$ | -           | -    | 0.1        | $\mu\text{s}$ |
|                  |  | $V_{CC}$ to $\overline{\text{RESET}}$ delay<br>$V_{IL} = \underline{V_{TH}} - 0.2\text{V}$ ,<br>$V_{IH} = \underline{V_{TH}} + 0.2\text{V}$   | -           | -    | 25         | $\mu\text{s}$ |
| $t_{\text{PLH}}$ | Propagation (Delay) Time, Low-to-high-level Output | $\overline{\text{MR}}$ to $\overline{\text{RESET}}$ delay (APX824/APX825A)<br>$V_{CC} > \underline{V_{TH}} + 0.2\text{V}$ ,<br>$V_{IL} = 0.3 \times V_{CC}$ ,<br>$V_{IH} = 0.7 \times V_{CC}$ | -           | -    | 0.1        | $\mu\text{s}$ |
|                  |  | $V_{CC}$ to $\overline{\text{RESET}}$ delay (APX824/APX825A)<br>$V_{IL} = \underline{V_{TH}} - 0.2\text{V}$ ,<br>$V_{IH} = \underline{V_{TH}} + 0.2\text{V}$                                  | -           | -    | 25         | $\mu\text{s}$ |

**Timing Diagram**

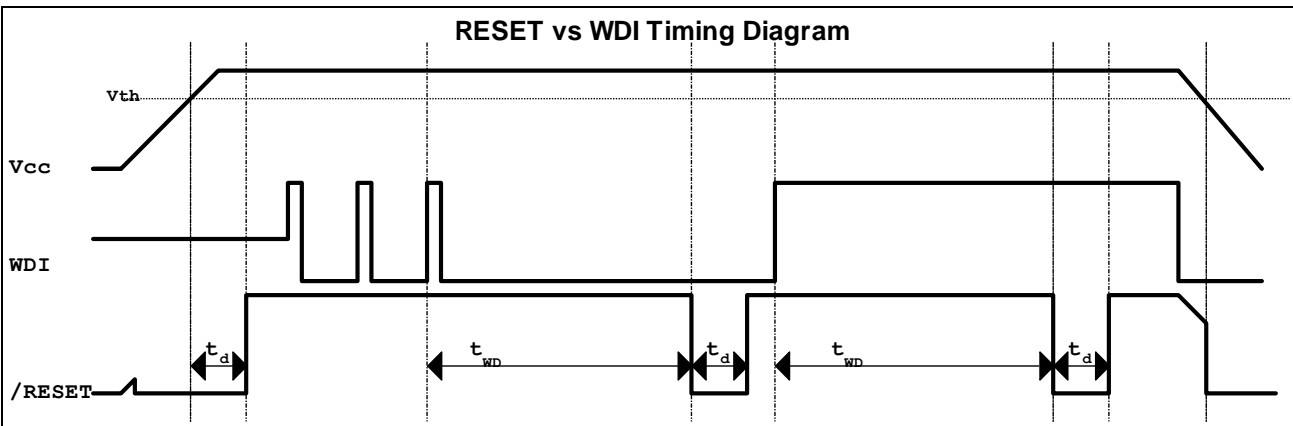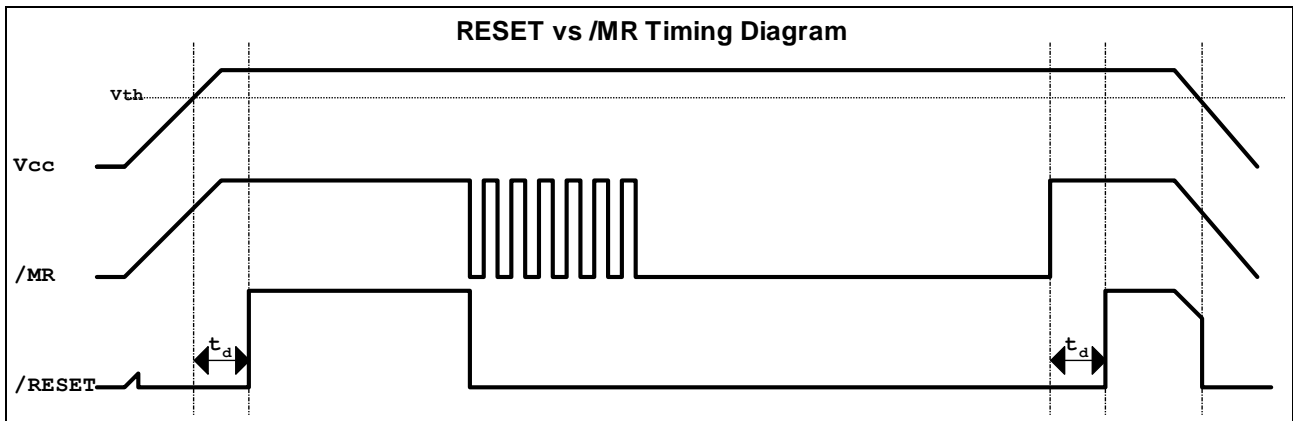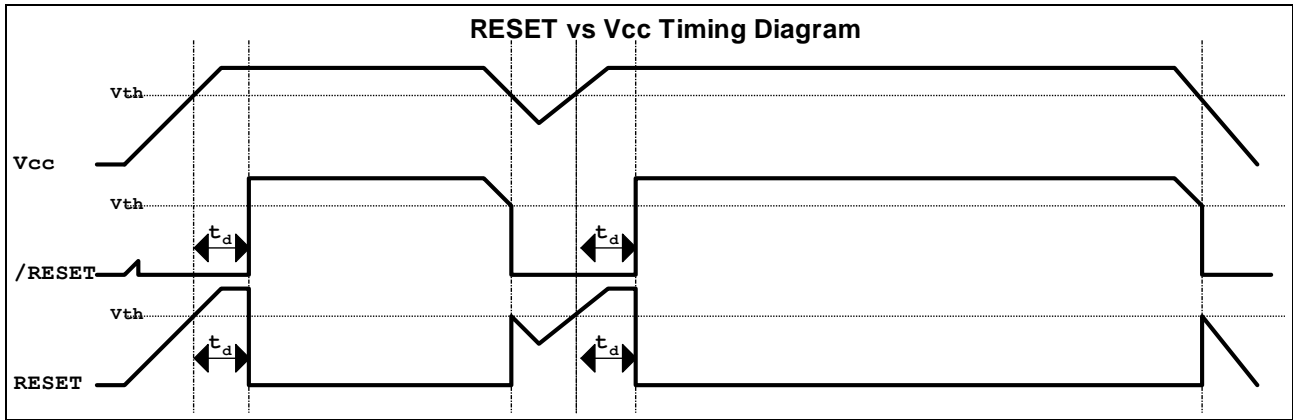


**Typical Characteristics**

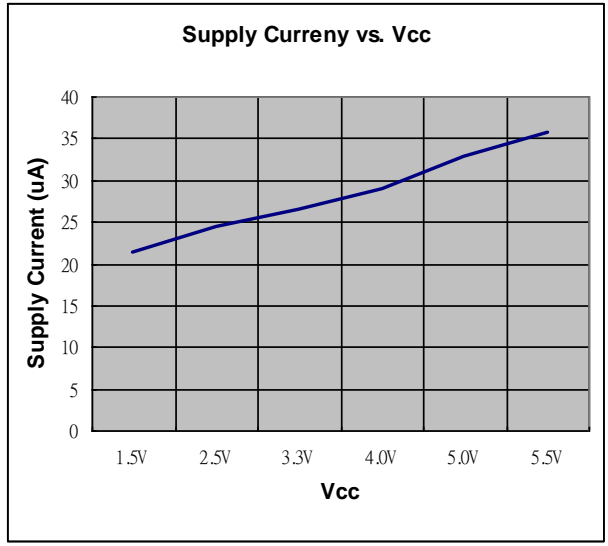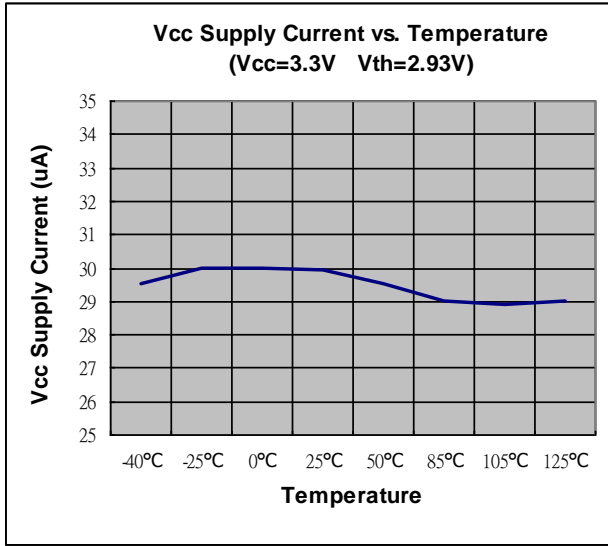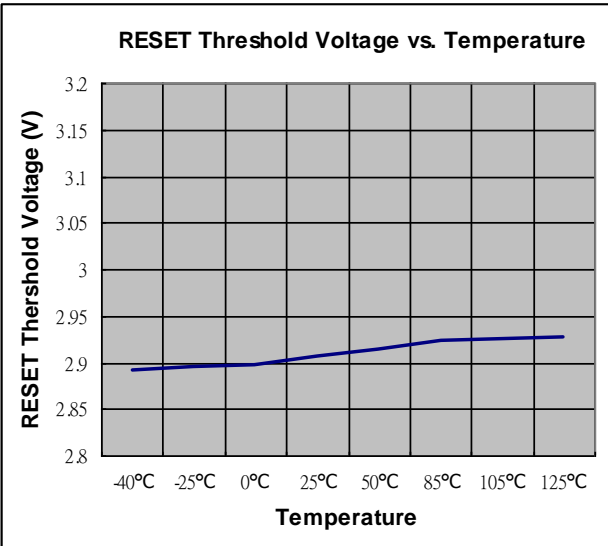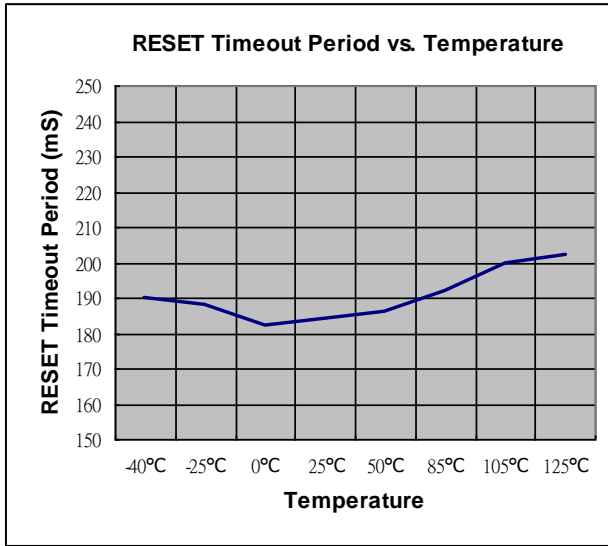



**Ordering Information**

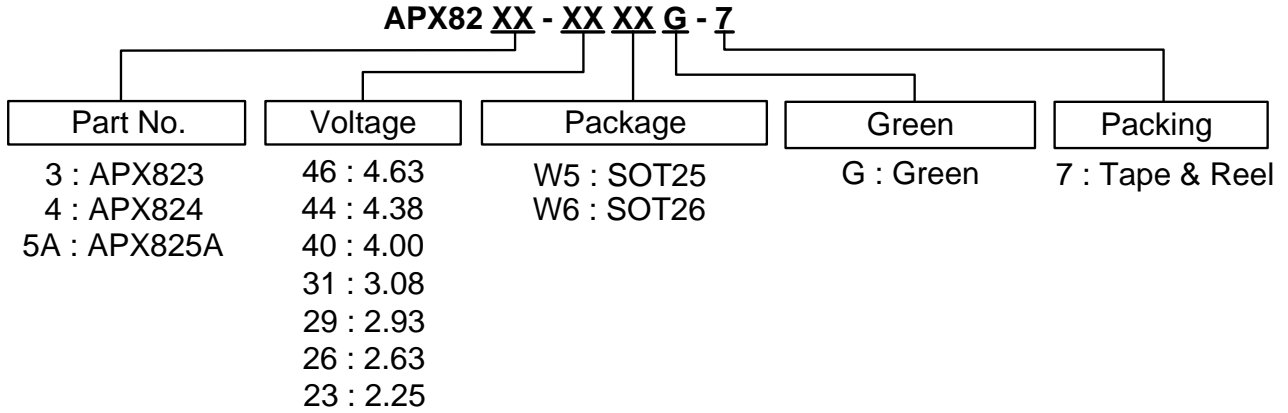


| Orderable Part Number | Package Code | Package (Note 7) | Packing  |                |                    |
|-----------------------|--------------|------------------|----------|----------------|--------------------|
|                       |              |                  | Quantity | Carrier        | Part Number Suffix |
| APX823-XXW5G-7        | W5           | SOT25            | 3,000    | 7" Tape & Reel | -7                 |
| APX824-XXW5G-7        | W5           | SOT25            | 3,000    | 7" Tape & Reel | -7                 |
| APX825A-XXW6G-7       | W6           | SOT26            | 3,000    | 7" Tape & Reel | -7                 |


Note: 7. For packaging details, go to our website at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

## Marking Information

(1) SOT25

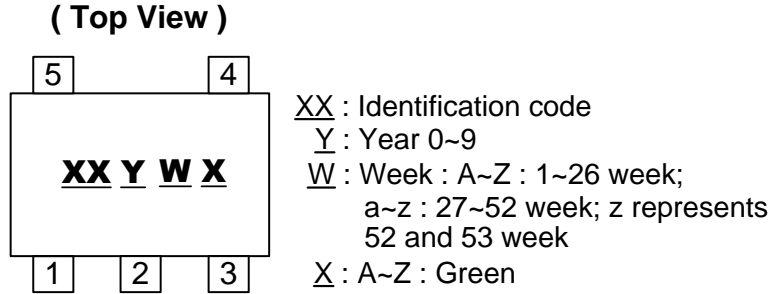

(2) SOT26

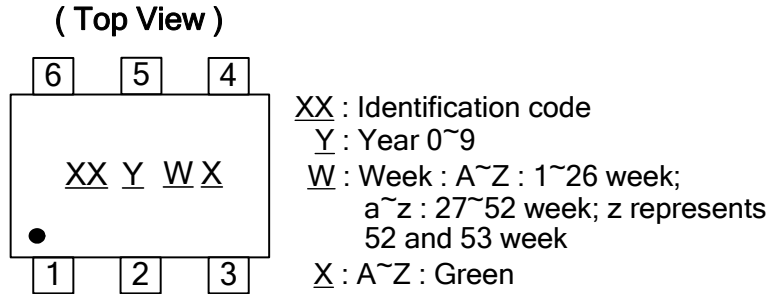


## Marking Table

| Device       | Package | Identification Code |
|--------------|---------|---------------------|
| APX823-46W5  | SOT25   | W1                  |
| APX823-44W5  | SOT25   | W2                  |
| APX823-40W5  | SOT25   | W3                  |
| APX823-31W5  | SOT25   | W4                  |
| APX823-29W5  | SOT25   | W5                  |
| APX823-26W5  | SOT25   | W6                  |
| APX823-23W5  | SOT25   | W7                  |
| APX824-46W5  | SOT25   | T2                  |
| APX824-44W5  | SOT25   | T3                  |
| APX824-40W5  | SOT25   | T4                  |
| APX824-31W5  | SOT25   | T5                  |
| APX824-29W5  | SOT25   | T6                  |
| APX824-26W5  | SOT25   | T7                  |
| APX824-23W5  | SOT25   | T8                  |
| APX825A-46W6 | SOT26   | T9                  |
| APX825A-44W6 | SOT26   | TA                  |
| APX825A-40W6 | SOT26   | TB                  |
| APX825A-31W6 | SOT26   | TC                  |
| APX825A-29W6 | SOT26   | TD                  |
| APX825A-26W6 | SOT26   | TE                  |
| APX825A-23W6 | SOT26   | TF                  |

**Package Outline Dimensions**


Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SOT25**

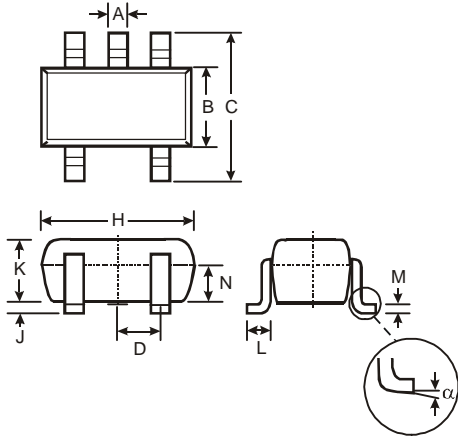

| SOT25                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A                    | 0.35  | 0.50 | 0.38 |
| B                    | 1.50  | 1.70 | 1.60 |
| C                    | 2.70  | 3.00 | 2.80 |
| D                    | -     | -    | 0.95 |
| H                    | 2.90  | 3.10 | 3.00 |
| J                    | 0.013 | 0.10 | 0.05 |
| K                    | 1.00  | 1.30 | 1.10 |
| L                    | 0.35  | 0.55 | 0.40 |
| M                    | 0.10  | 0.20 | 0.15 |
| N                    | 0.70  | 0.80 | 0.75 |
| α                    | 0°    | 8°   | -    |
| All Dimensions in mm |       |      |      |

**SOT26**

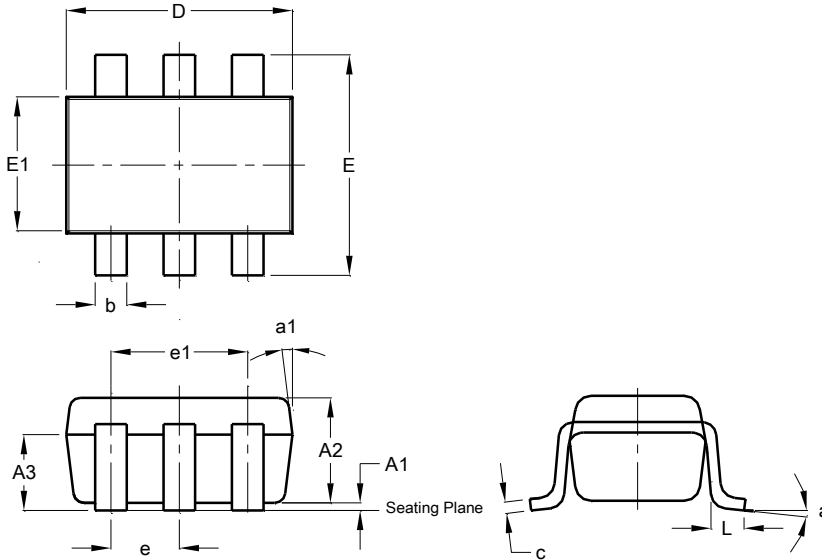


| SOT26                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A1                   | 0.013 | 0.10 | 0.05 |
| A2                   | 1.00  | 1.30 | 1.10 |
| A3                   | 0.70  | 0.80 | 0.75 |
| b                    | 0.35  | 0.50 | 0.38 |
| c                    | 0.10  | 0.20 | 0.15 |
| D                    | 2.90  | 3.10 | 3.00 |
| e                    | -     | -    | 0.95 |
| e1                   | -     | -    | 1.90 |
| E                    | 2.70  | 3.00 | 2.80 |
| E1                   | 1.50  | 1.70 | 1.60 |
| L                    | 0.35  | 0.55 | 0.40 |
| a                    | -     | -    | 8°   |
| a1                   | -     | -    | 7°   |
| All Dimensions in mm |       |      |      |

**Suggested Pad Layout**


Please see <http://www.diodes.com/package-outlines.html> for the latest version.

**SOT25**



| Dimensions | Value |
|------------|-------|
| Z          | 3.20  |
| G          | 1.60  |
| X          | 0.55  |
| Y          | 0.80  |
| C1         | 2.40  |
| C2         | 0.95  |

**SOT26**

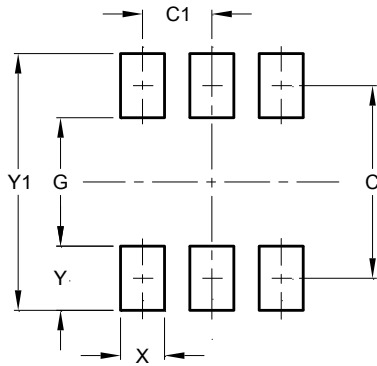

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 2.40          |
| C1         | 0.95          |
| G          | 1.60          |
| X          | 0.55          |
| Y          | 0.80          |
| Y1         | 3.20          |

**Mechanical Data**

- Moisture Sensitivity:
  - SOT25 Level 3 per J-STD-020
  - SOT26 Level 3 per J-STD-020
- Terminals: Finish — Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 ③
- Weight:
  - SOT25: 0.0153 grams (Approximate)
  - SOT26: 0.016 grams (Approximate)

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2024 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](http://www.diodes.com)