

## ZXTD3M832

---

### MPPS™ Miniature Package Power Solutions

### DUAL 40V PNP LOW SATURATION TRANSISTOR

---

#### SUMMARY


PNP —  $V_{CEO} = -40V$ ;  $R_{SAT} = 104m\Omega$ ;  $I_C = -3A$

#### DESCRIPTION

Packaged in the new innovative 3mm x 2mm MLP (Micro Leaded Package) outline, these new 4<sup>th</sup> generation low saturation dual PNP transistors offer extremely low on state losses making them ideal for use in DC-DC circuits and various driving and power management functions.

Additionally users gain several other **key benefits**:

- Performance capability equivalent to much larger packages
- Improved circuit efficiency & power levels
- PCB area and device placement savings
- Lower Package Height (0.9mm nom)
- Reduced component count




MLP832

#### FEATURES

- Low Equivalent On Resistance
- Extremely Low Saturation Voltage (-220mV max @1A)
- $h_{FE}$  specified up to -3A
- $I_C = -3A$  Continuous Collector Current
- 3mm x 2mm MLP

#### APPLICATIONS

- DC - DC Converters
- Charging circuits
- Power switches
- Motor control
- CCFL Backlighting




#### ORDERING INFORMATION

DEVICE	REEL SIZE	TAPE WIDTH	QUANTITY PER REEL
ZXTD3M832TA	7"	8mm	3000
ZXTD3M832TC	13"	8mm	10000

#### DEVICE MARKING

- D33



Underside view

## ZXTD3M832

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	$V_{CBO}$	-50	V
Collector-Emitter Voltage	$V_{CEO}$	-40	V
Emitter-Base Voltage	$V_{EBO}$	-7.5	V
Peak Pulse Current	$I_{CM}$	-4	A
Continuous Collector Current <sup>(a) (f)</sup>	$I_C$	-3	A
Base Current	$I_B$	-1000	mA
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(a)(f)</sup>	$P_D$	1.5	W
Linear Derating Factor		12	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(b)(f)</sup>	$P_D$	2.45	W
Linear Derating Factor		19.6	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(c)(f)</sup>	$P_D$	1	W
Linear Derating Factor		8	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(d)(f)</sup>	$P_D$	1.13	W
Linear Derating Factor		9	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(d)(g)</sup>	$P_D$	1.7	W
Linear Derating Factor		13.6	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ <sup>(e)(g)</sup>	$P_D$	3	W
Linear Derating Factor		24	mW/ $^\circ\text{C}$
Operating & Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	$^\circ\text{C}$
Junction Temperature	$T_j$	150	$^\circ\text{C}$

### THERMAL RESISTANCE

PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient <sup>(a)(f)</sup>	$R_{\theta JA}$	83.3	$^\circ\text{C}/\text{W}$
Junction to Ambient <sup>(b)(f)</sup>	$R_{\theta JA}$	51	$^\circ\text{C}/\text{W}$
Junction to Ambient <sup>(b)(f)</sup>	$R_{\theta JA}$	125	$^\circ\text{C}/\text{W}$
Junction to Ambient <sup>(d)(f)</sup>	$R_{\theta JA}$	111	$^\circ\text{C}/\text{W}$
Junction to Ambient <sup>(d)(g)</sup>	$R_{\theta JA}$	73.5	$^\circ\text{C}/\text{W}$
Junction to Ambient <sup>(e)(g)</sup>	$R_{\theta JA}$	41.7	$^\circ\text{C}/\text{W}$

#### NOTES

(a) For a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(b) Measured at  $t < 5$  secs for a dual device surface mounted on 8 sq cm single sided 2oz copper on FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(c) For a dual device surface mounted on 8 sq cm single sided 2oz copper FR4 PCB, in still air conditions **with minimal lead connections only**.

(d) For a dual device surface mounted on 10 sq cm single sided 1oz copper FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(e) For a dual device surface mounted on 85 sq cm single sided 2oz copper FR4 PCB, in still air conditions **with all exposed pads attached**. The copper area is split down the centre line into two separate areas with one half connected to each half of the dual device.

(f) For dual device with one active die.


(g) For dual device with 2 active die running at equal power.

(h) Repetitive rating - pulse width limited by max junction temperature. Refer to Transient Thermal Impedance graph.

(i) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device as shown in the package dimensions data. The thermal resistance for a dual device mounted on 1.5mm thick FR4 board using minimum copper of 1 oz weight, 1mm wide tracks and one half of the device active is  $R_{th} = 250^\circ\text{C}/\text{W}$  giving a power rating of  $P_{tot} = 500\text{mW}$

ZXTD3M832

TYPICAL CHARACTERISTICS

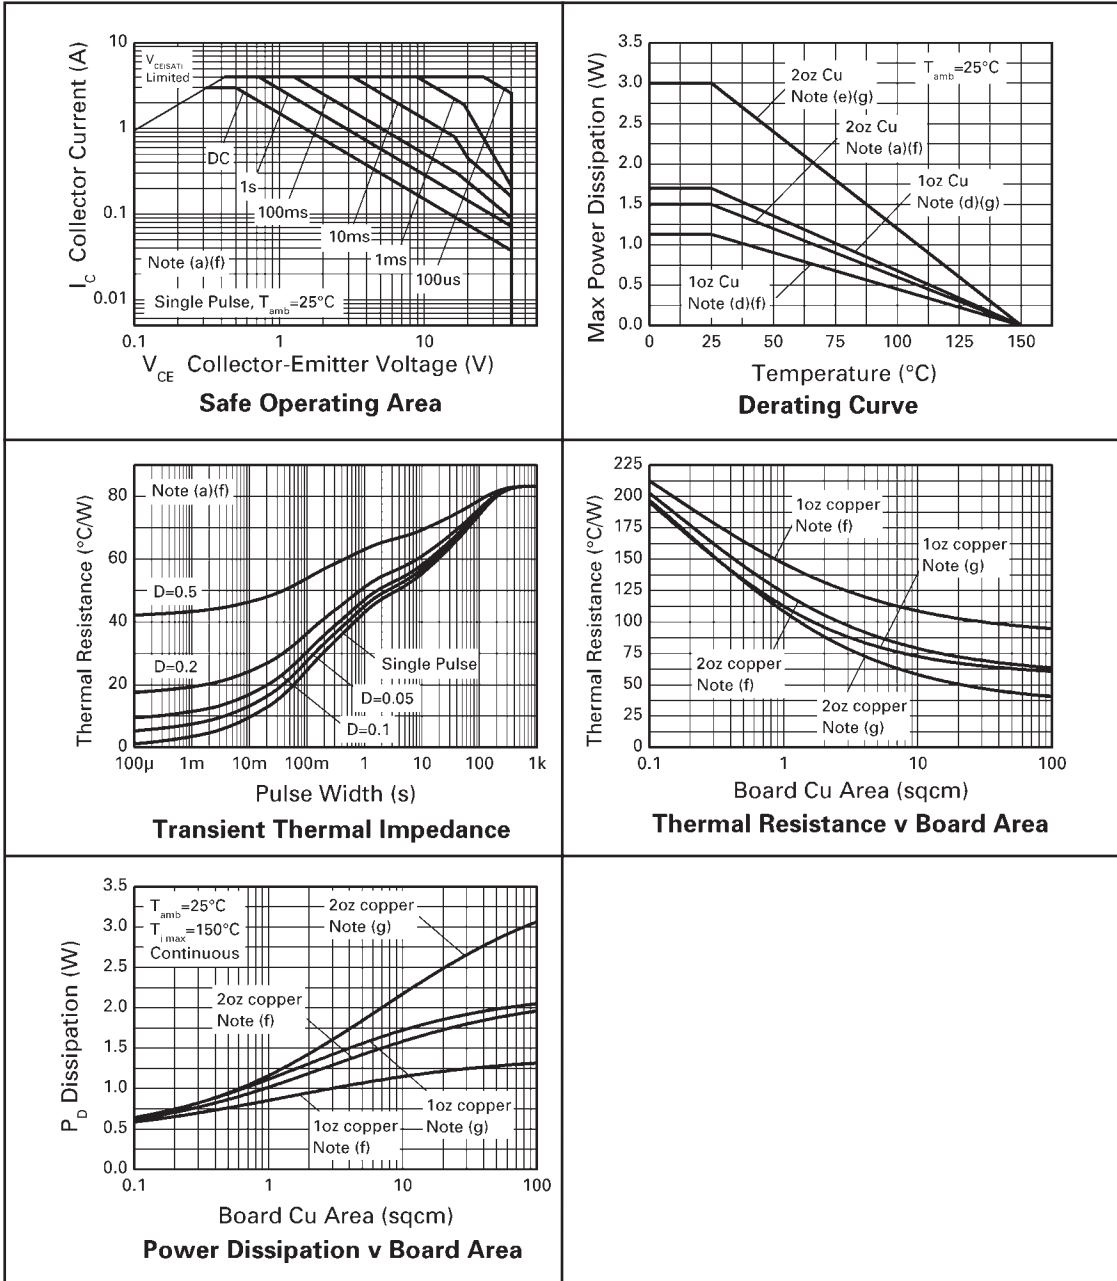

## ZXTD3M832


### PNP TRANSISTOR ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-50	-80		V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-40	-70		V	$I_C = -10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-7.5	-8.5		V	$I_E = -100\mu\text{A}$
Collector Cut-Off Current	$I_{CBO}$			-25	nA	$V_{CB} = -40\text{V}$
Emitter Cut-Off Current	$I_{EBO}$			-25	nA	$V_{EB} = -6\text{V}$
Collector Emitter Cut-Off Current	$I_{CES}$			-25	nA	$V_{CES} = -32\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-25 -150 -195 -210 -260	-40 -220 -300 -300 -370	mV	$I_C = -0.1\text{A}, I_B = -10\text{mA}^*$ $I_C = -1\text{A}, I_B = -50\text{mA}^*$ $I_C = -1.5\text{A}, I_B = -100\text{mA}^*$ $I_C = -2\text{A}, I_B = -200\text{mA}^*$ $I_C = -2.5\text{A}, I_B = -250\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-0.97	-1.05	V	$I_C = -2.5\text{A}, I_B = -250\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-0.89	-0.95	V	$I_C = -2.5\text{A}, V_{CE} = -2\text{V}^*$
Static Forward Current Transfer Ratio	$h_{FE}$	300 300 180 60 12	480 450 290 130 22			$I_C = -10\text{mA}, V_{CE} = -2\text{V}^*$ $I_C = -0.1\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -1\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -1.5\text{A}, V_{CE} = 2\text{V}^*$ $I_C = -3\text{A}, V_{CE} = -2\text{V}^*$
Transition Frequency	$f_T$	150	190		MHz	$I_C = -50\text{mA}, V_{CE} = -10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	$C_{obo}$		19	25	pF	$V_{CB} = -10\text{A}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		40		ns	$V_{CC} = -15\text{V}, I_C = -0.75\text{A}$
Turn-Off Time	$t_{(off)}$		435		ns	$I_{B1} = I_{B2} = -15\text{mA}$

\*Measured under pulsed conditions. Pulse width=300 $\mu\text{s}$ . Duty cycle  $\leq 2\%$


ZXTD3M832

TYPICAL CHARACTERISTICS

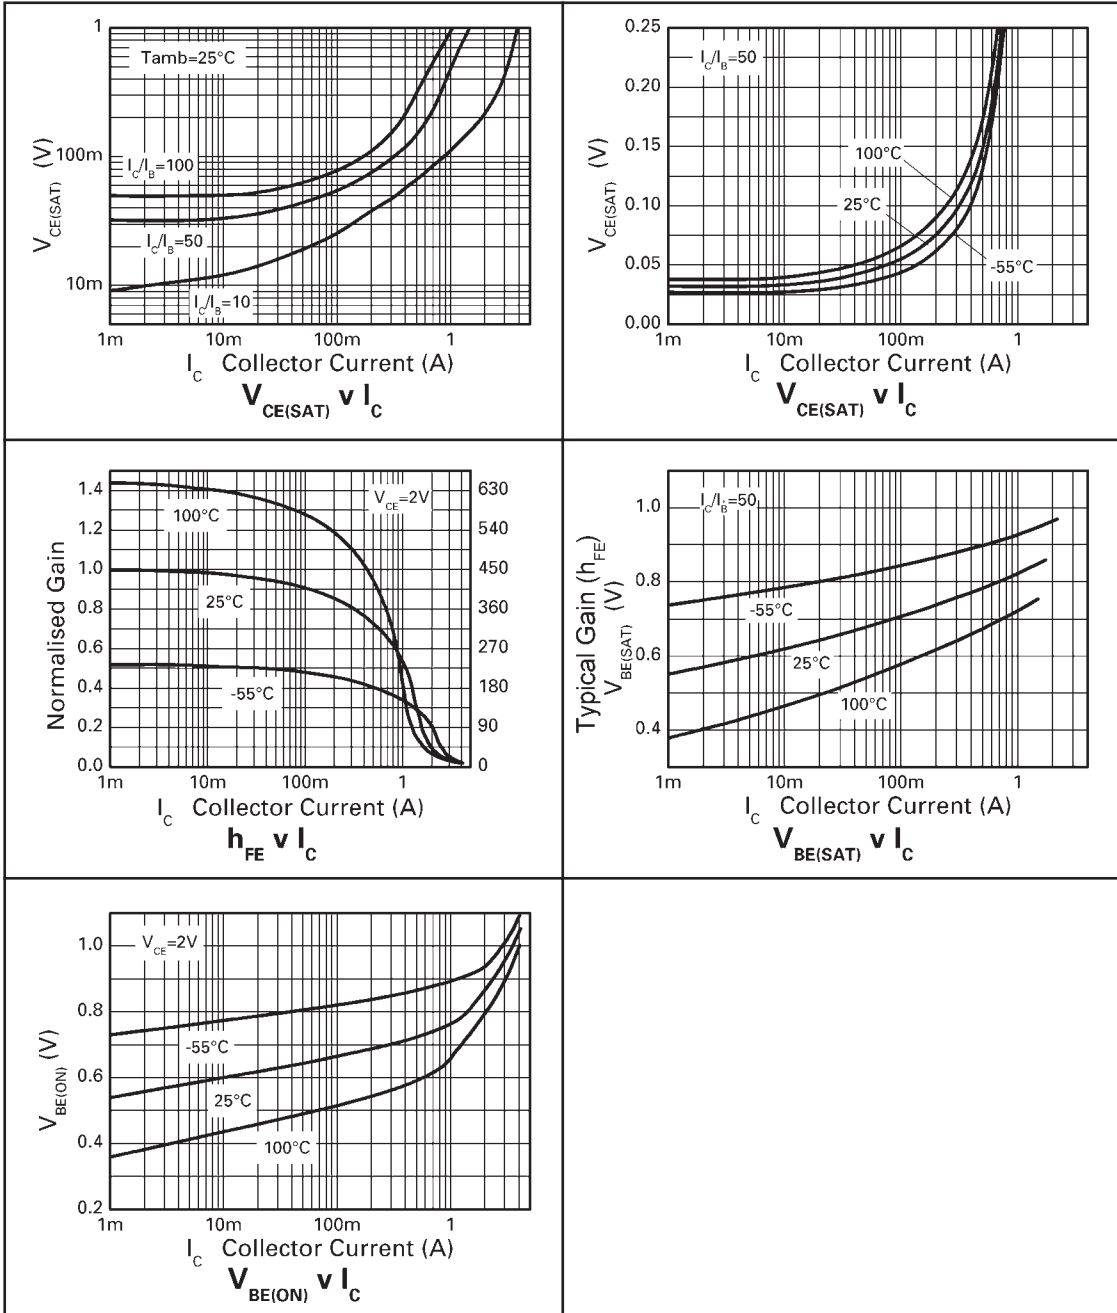

## ZXTD3M832

### PACKAGE OUTLINE

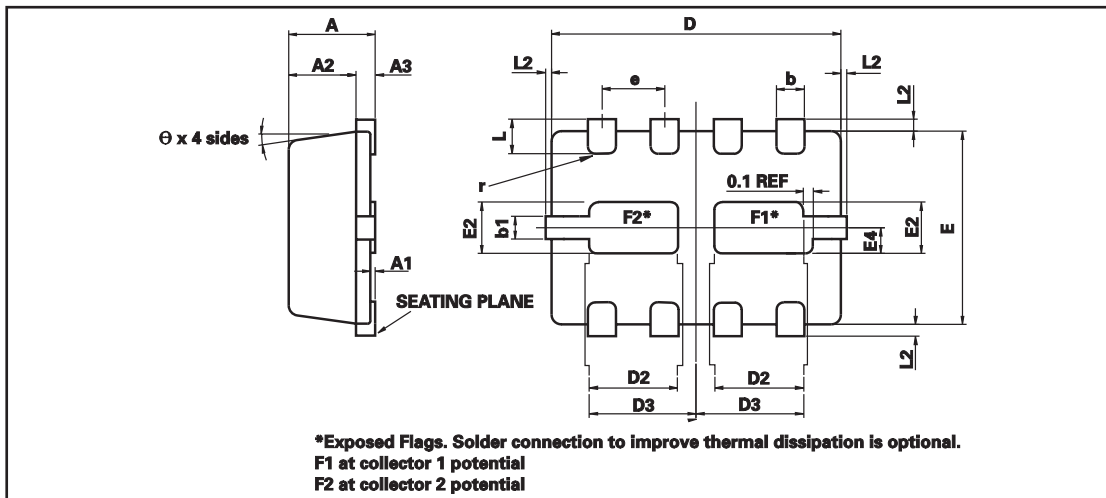

Controlling dimensions are in millimetres. Approximate conversions are given in inches

### PACKAGE DIMENSIONS

DIM	Millimetres		Inches		DIM	Millimetres		Inches	
	Min	Max	Min	Max		Min	Max	Min	Max
A	0.80	1.00	0.031	0.039	e	0.65 REF		0.0256 BSC	
A1	0.00	0.05	0.00	0.002	E	2.00 BSC		0.0787 BSC	
A2	0.65	0.75	0.0255	0.0295	E2	0.43	0.63	0.017	0.0249
A3	0.15	0.25	0.006	0.0098	E4	0.16	0.36	0.006	0.014
b	0.24	0.34	0.009	0.013	L	0.20	0.45	0.0078	0.0157
b1	0.17	0.30	0.0066	0.0118	L2	—	0.125	0.00	0.005
D	3.00 BSC		0.118 BSC		r	0.075 BSC		0.0029	
D2	0.82	1.02	0.032	0.040	θ	0°	12°	0°	12°
D3	1.01	1.21	0.0397	0.0476					

© Zetex plc 2003

#### Europe

Zetex plc  
Fields New Road  
Chadderton  
Oldham, OL9 8NP  
United Kingdom  
Telephone (44) 161 622 4444  
Fax: (44) 161 622 4446  
hq@zetex.com

Zetex GmbH  
Streitfeldstraße 19  
D-81673 München  
Germany  
Telefon: (49) 89 45 49 49 0  
Fax: (49) 89 45 49 49 49  
europe.sales@zetex.com

#### Americas

Zetex Inc  
700 Veterans Memorial Hwy  
Hauppauge, NY 11788  
USA  
Telephone: (1) 631 360 2222  
Fax: (1) 631 360 8222  
usa.sales@zetex.com

#### Asia Pacific

Zetex (Asia) Ltd  
3701-04 Metroplaza Tower 1  
Hing Fong Road  
Kwai Fong  
Hong Kong  
Telephone: (852) 26100 611  
Fax: (852) 24250 494  
asia.sales@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to [www.zetex.com](http://www.zetex.com)