

Description

The APR348 is a secondary-side MOSFET driver for synchronous rectification, which can effectively reduce the secondary-side rectifier power dissipation and provide a high-performance solution.

The APR348 can support continuous or discontinuous conduction mode (CCM and DCM) and quasi-resonant flyback operation based on a MOSFET operating on-time control technology. This technology provides minimized turn-on and turn-off delay to reduce power loss and keep safe operation without adding any external components or circuitry.

The APR348 can configure into high-side or low-side application to fit various design requirement. It also has specialized light load mode and determines safe driver pulse generation through load detection. The VDD power supply can be charged by VDET or VCC, which means it can be charged by internal PLR (Pulse linear regulator) at low output voltage and charged by internal LDO at high output voltage. Therefore, it can provide a wide output operation voltage from 3.3V to 20V.

The APR348 is available in SOT26 (Type CJ) package.


Features

- Synchronous Rectification Controller
- Suited for High-Side and Low-Side Flyback Converters in CCM/DCM/QR Operation
- Minimized Turn-On and Turn-Off Delay
- Internal UVLO Protection
- Light Load Mode Control
- Eliminate False Turn-On with Resonant Ring
- Fewest External Components
- Moisture Sensitivity: MSL Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per M2003 JESD22-B102, Method 208 (E3)
- Weight: 0.016/0.017 grams (Approximate)
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. “Green” Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](#) or your local Diodes representative. <https://www.diodes.com/quality/product-definitions/>**

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Pin Assignments

(Top View)

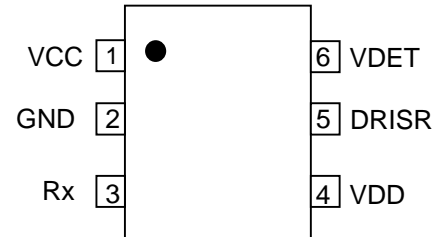


SOT26 (Type CJ)

Applications

- Adapters/Chargers for Cell/Cordless Phones, ADSL Modems, MP3 and Other Portable Apparatus


Typical Applications Circuit

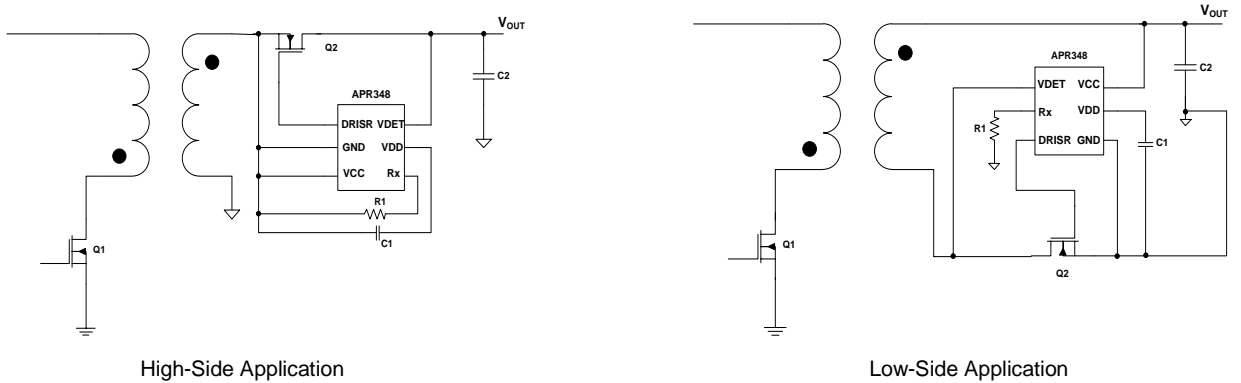

Pin Descriptions

Pin Number	Pin Name	Function
1	VCC	Internal Linear Regulator Input
2	GND	Ground, also used as FET source sense reference for VDET
3	Rx	External fixed resistor for Accurate Turn-On Signal
4	VDD	Linear Regulator Output. It provides bias voltage for the internal logic circuit and the MOSFET driver. Connect this pin to a capacitor.
5	DRISR	Synchronous Rectification MOSFET Gate Drive
6	VDET	Synchronous Rectification MOSFET Drain Voltage Sense Input

Functional Block Diagram

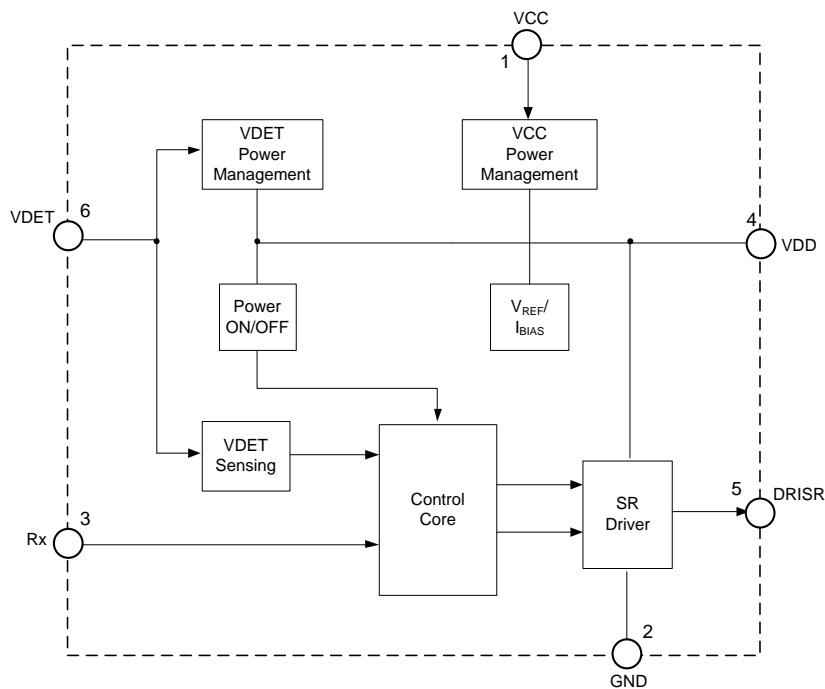

Absolute Maximum Ratings (Note 4)

Symbol	Parameter	Rating	Unit
V _{CC}	Supply Voltage	-0.3 to 28	V
V _{DET}	Voltage at VDET Pin	-0.7 to 150	V
V _{DRISR}	Voltage at DRISR Pin	-0.3 to 7	V
V _{RX}	Voltage at Rx Pin	-0.3 to 7	V
P _D	Power Dissipation at T _A = +25°C	0.6	W
T _J	Operating Junction Temperature	+150	°C
T _{STG}	Storage Temperature	-65 to +150	°C
T _{LEAD}	Lead Temperature (Soldering, 10s)	+300	°C
θ _{JA}	Thermal Resistance (Junction to Ambient) (Note 5)	197	°C/W
θ _{JC}	Thermal Resistance (Junction to Case) (Note 5)	76	°C/W
ESD	Human Body Model (Except VDET Pin) (Note 6)	6,000	V
	Charge Device Model	1500	V

- Notes:
- Stresses greater than those listed under *Absolute Maximum Ratings* can cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to *Absolute Maximum Ratings* for extended periods can affect device reliability.
 - Test condition: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch² cooling area.
 - VDET pin are ESD sensitive. (HBM: V_{DET} = 2000V).

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	Supply Voltage	0	22	V
T _A	Ambient Temperature	-40	+85	°C

Electrical Characteristics (@V_{CC} = 5V, T_A = -40°C < T_A < +85°C, unless otherwise specified.)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Supply Voltage (VCC Pin)						
V _{LDO_DISABLE}	V _{CC} LDO Disable Threshold at VCC Falling	—	4.25	4.55	4.85	V
V _{LDO_ENABLE}	V _{CC} LDO Enable Threshold at VCC Rising	—	4.35	4.65	4.95	V
V _{LDO_HYS}	LDO Operating Hysteresis at VCC Pin	—	—	100	—	mV
Supply Linear Regulator (VDD Pin)						
V _{DD}	Internal Power Supply	V _{CC} = 12V, V _{DET} = 12V	5	5.5	6	V
		V _{CC} = 3V, V _{DET} = 12V	5.3	5.9	6.5	V
I _{STARTUP}	V _{DD} Startup Current	V _{CC} = 0, V _{DET} = V _{DD} = V _{DD_ST} - 0.1V	—	125	160	μA
V _{DD_ST}	V _{DD} Startup Voltage	—	3.55	3.75	3.95	V
V _{DD_UVLO}	V _{DD} UVLO Voltage	—	3.30	3.50	3.70	V
V _{UVLO_HYSTERESIS}	UVLO Hysteresis	—	—	0.25	—	V
I _{Q_VDD}	Quiescent Current	V _{DD} = 5.5V, V _{CC} = 0	—	170	220	μA
Synchronous Rectification MOSFET Sense (VDET Pin)						
V _{THON}	Gate Turn-On Threshold	Voltage at VDET Pin	-130	-90	-60	mV
V _{FWD}	Gate Regulation Voltage	Voltage at VDET Pin	-55	-45	-35	mV
V _{THOFF}	Gate Turn-Off Threshold	Voltage at VDET Pin	—	-7	0	mV
Gate Driver (DRISR Pin)						
V _{DRISR(High)}	Synchronous Rectification Drive Voltage High	—	V _{DD} - 0.1	—	—	V
V _{DRISR(Low)}	Synchronous Rectification Drive Voltage Low	I _{G_LOAD} = 100mA, V _{DD} = 5V	—	70	140	mV
t _{DON}	Turn-On Delay Time	C _{LOAD} = 2.2nF	—	30	60	ns
t _{DOFF}	Turn-Off Propagation Delay Time	C _{LOAD} = 2.2nF	—	25	45	ns
t _{ON_MIN}	Minimum On-Time	—	0.8	1.2	1.6	μs
I _{SOURCE}	Maximum Source Current (Note 7)	—	—	0.6	—	A
I _{SINK}	Maximum Sink Current (Note 7)	—	—	3.5	—	A
R _g	Pull-Down Impedent	I _{G_LOAD} = 100mA, V _{DD} = 5V	—	0.7	1.4	Ω

Note: 7. These parameters are guaranteed by design and characterization.

Synchronous Rectification Principle Description

Synchronous Rectification MOSFET Turn-On

The APR348 determines the synchronous rectification MOSFET turn-on time by monitoring the MOSFET drain-to-source voltage. Because of the parasitic parameter, the voltage on the MOSFET drain pin has moderate voltage ringing, which may affect the SR controller VDET voltage sense and bring about a turn-on/off fault.

To avoid this conduction fault, the APR348 has internal judge methods to determinate the turn-on moment of synchronous rectification MOSFET. Meanwhile, APR348 has a minimum on-time (t_{ON_MIN} , which is shown in Figure 1) blanking period that keeps the power MOSFET on for a minimum amount of time. When the controlled MOSFET gate turns on, some ringing noises generate. The minimum on-time timer blanks the V_{THOFF} comparator, which keeps the controlled MOSFET on for at least the minimum on-time. During the minimum on-time, the turn-off threshold is blanked unless the V_{DS} ringing voltage goes over 2V during this period.

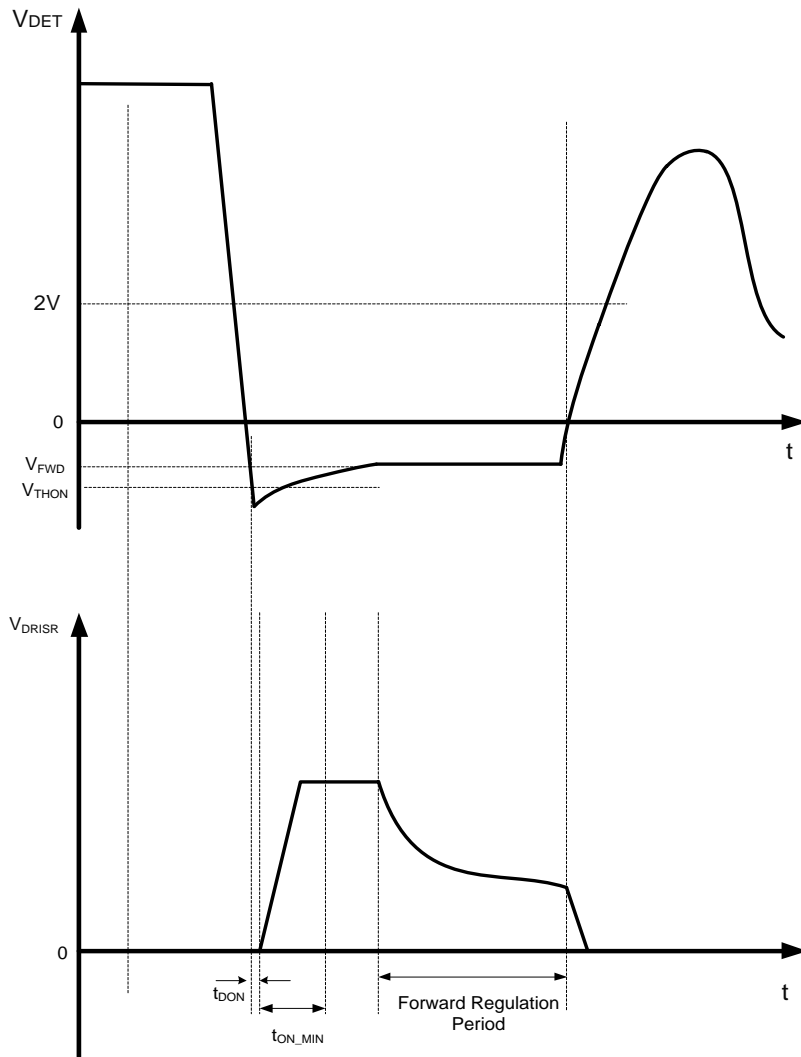


Figure 1. APR348 Switch Period

Synchronous Rectification Principle Description (continued)

The Value and Meaning of Rx Resistance

After the secondary rectifier stops conduction with DCM operation, the primary MOSFET drain-to-source generates a ringing waveform, which results from the resonant of primary inductance and equivalent switch-device output capacitance. This ringing waveform most likely leads to the synchronous rectifier fault conduction. APR348 integrates an accurate turn-on voltage threshold and internal judge criteria to determine whether synchronous rectification MOSFET can turn on or not. Rx is an external resistor, which multiplies with an internal current source to generate an accurate reference for turn-on threshold judgment. Proposed to use 30kΩ to 40kΩ resistance for Rx value.

Synchronous Rectification Forward Regulation and Turn-Off Stage

Once the synchronous rectification gate outputs high levels and the synchronous rectification MOSFET turns on, the secondary-side current goes through synchronous rectification MOSFET. The voltage drop on synchronous rectification MOSFET is found by $R_{DS(ON)} \times$ secondary-side current. After minimum turn-on time t_{ONMIN} , the IC continuously monitors V_{DS} by the VDET pin and generates a pull-down current from the MOSFET gate until $V_{DET} > -45mV$. The MOSFET drain-to-source voltage would remain at around -45mV with the secondary-side current decreasing. Real MOSFET gate voltage depends on the MOSFET characteristics and drain current. When the primary MOSFET turns on, the secondary V_{DS} would rise up. Once V_{DET} rises to trigger the turn-off threshold, the gate signal will be pulled down to GND. The synchronous rectification MOSFET gate voltage drops quickly from a low voltage to zero after a very short turn-off delay.


Light Load Mode (LL Mode)

The APR348 provides light-load mode when the system goes into burst or no-load condition with interval-time pulses for low standby loss. The IC internal has two timers, one is 640μs and the other is 2.5ms. When the interval time is between 640μs and 2.5ms, the gate drive outputs will skip the first two cycles. When the interval time is over 2.5ms, gate drive outputs will skip the first eight cycles.

VDD Regulator and UVLO Protection

The VDD is an internal linear regulator output. When the synchronous rectification MOSFET and the IC are connected in low side, the V_{DD} is supplied by both VDET pin and VCC pin. When synchronous rectification MOSFET and IC are connected in high side, the V_{DD} is supplied only via VDET. A large capacitor (typical 4.7μF) at VDD pin is proposed for system design. The APR348 also has the UVLO protection. When V_{DD} drops below V_{DD_UVLO} , the IC will stop working.


Ordering Information

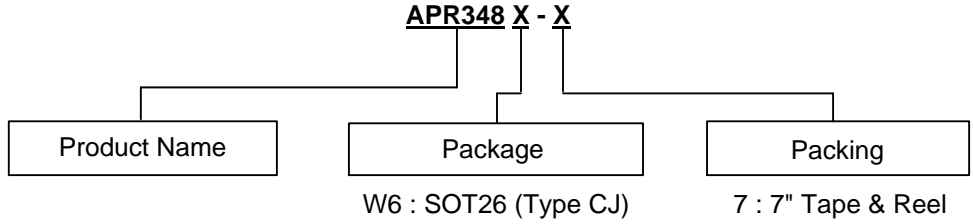

Package	Temperature Range	Part Number	Identification Code	7" Tape and Reel	
				Quantity	Part Number Suffix
SOT26 (Type CJ)	-40°C to +85°C	APR348W6-7	DY	3000/Tape and Reel	-7

Marking Information

SOT26 (Type CJ)




- XX : Identification Code
- Y : Year 0~9
- W : Week : A~Z : 1~26 week;
a~z : 27~52 week; z represents 52 and 53 week
- X : Internal Code

Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SOT26 (Type CJ)

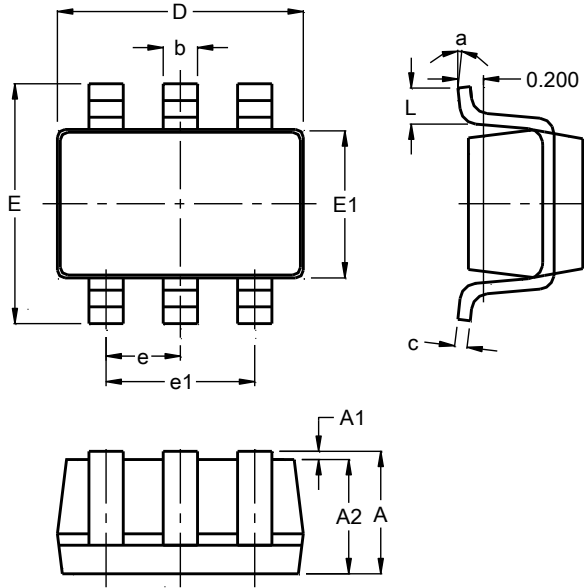


SOT26 (Type CJ)			
Dim	Min	Max	Typ
A	1.050	1.250	--
A1	0.00	0.10	--
A2	1.050	1.150	--
b	0.300	0.500	--
c	0.100	0.200	--
D	2.820	3.020	--
E	2.650	2.950	--
E1	1.500	1.700	--
e	0.950BSC		
e1	1.800	2.000	--
L	0.300	0.600	--
a	0°	8°	--
All Dimensions in mm			

Suggested Pad Layout

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

SOT26 (Type CJ)

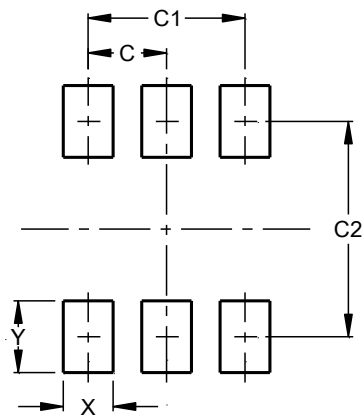

Dimensions	Value (in mm)
C	0.95
C1	1.90
C2	2.40
X	0.60
Y	1.00

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com