

## ZXGD3104EV2 USER GUIDE

### Introduction

The purpose of this board is to demonstrate the driving of a synchronous MOSFET as a Schottky replacement in isolated power supplies. The circuit is suitable for use in AC/DC Flyback converters. End applications include external power adaptors for laptops greater than 90W, and LED monitors. When used to drive a low on-resistance MOSFET, the board increases power efficiency whilst still maintaining simplicity of design.

### Performance

- Recommended supply voltage VIN: 19V
- Gate voltage clamped to 12V maximum
- Ideal for Quasi Resonant operation
- Switching frequency up to 250KHz

### Ordering Information

Order Number
ZXGD3104EV2

**Caution: Do not connect the evaluation board to a supply voltage, VIN, greater than 25V!**

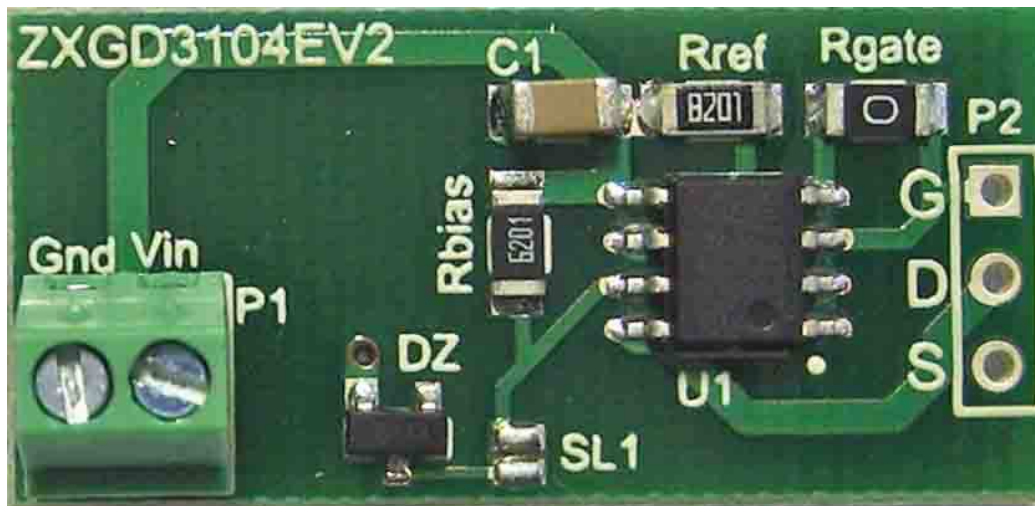


Figure 1. Evaluation board layout

## Evaluation guide

There are two possible test setups for the evaluation board. The preferred setup is low side synchronous rectification (see Figure 2b), due to the ease of acquiring the supply voltage to the board directly from the output of the power supply. The other option is shown in Figure 3a. Figure 3a shows the board driving a MOSFET for high side rectification.

### Low side synchronous rectification

1. Remove the original Schottky from the power supply
2. Apply a short across the Schottky's K and A terminals
3. Cut the track that connects the negative terminal of the output filter capacitor to the output of the transformer winding.
4. Insert a low on-resistance MOSFET between the cut tracks. The Drain terminal of the MOSFET should be connected to the output of the transformer winding, whilst the Source terminal is connected to the output capacitor.

**Caution: The MOSFET breakdown must be higher than the maximum Drain-Source voltage spike, plus a 10% to 30% margin.**

5. Connect the power supply's output voltage, 19V, to the terminal block P1 (see Figure 2b).
6. Connect an AC voltage source to the power supply's input.
7. Turn on the AC voltage source and measure the efficiency.

### High side synchronous rectification

8. Remove the original Schottky from the power supply
9. Insert a low on-resistance MOSFET to replace the Schottky. The Source terminal of the MOSFET should be connected to the output of the transformer winding, whilst the Drain terminal should be connected to the output capacitor
10. Connect a 10V auxiliary supply to terminal block P1 (see Figure 2a).
11. Connect an AC voltage source voltage to the power supply's input.
12. Turn on the power supply and measure the efficiency.

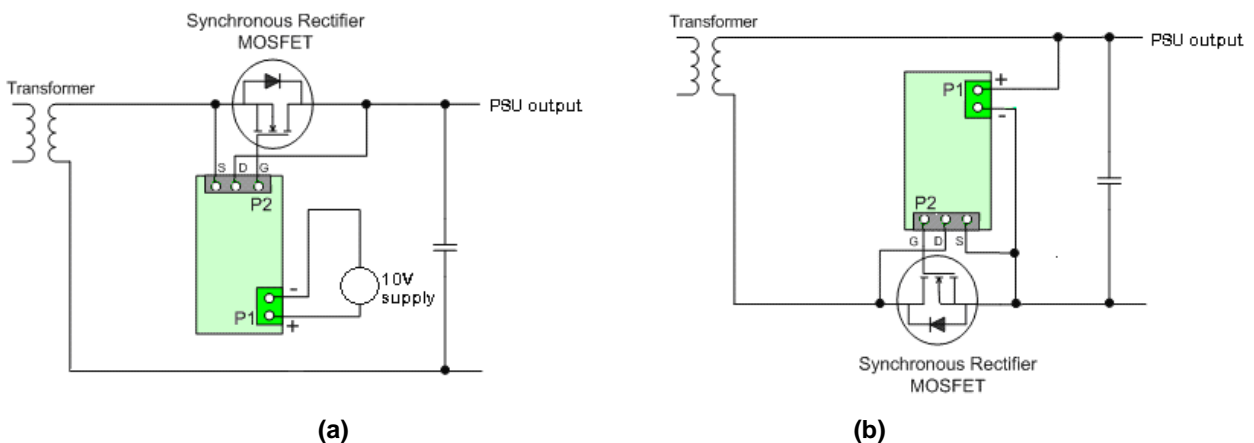


Figure 2: Test options for evaluation board a) high side rectification and b) low side rectification

### Conditioning the power supply to maximize efficiency

Any stray inductance in the load current path may cause distortion of the drain-to-source voltage waveform, leading to premature turn-off of the synchronous MOSFET. In order to avoid this issue, drain voltage sensing should be done as physically close to the drain terminals as possible. The PCB track length between the Drain pin and the MOSFET's terminal should be kept to less than 10mm. MOSFET packages with a low internal wire-bond inductance are preferred for high switching frequency power conversion, to minimize body-diode conduction.

After the primary MOSFET turns off, its drain voltage oscillates due to the reverse recovery of the snubber diode. These high frequency oscillations are reflected into the transformer secondary winding and the drain terminal of the synchronous MOSFET. The synchronous IC senses the drain voltage ringing, causing its gate output voltage to oscillate. The synchronous MOSFET cannot be fully enhanced until the drain voltage stabilizes.

In order to prevent this issue, the oscillations on the primary MOSFET can be damped with either a series resistor  $R_d$  to the snubber diode  $D_{snub}$ , or an R-C network across  $D_{snub}$  as shown in Figure 3. Both methods reduce the oscillations by softening the snubber diode's reverse recovery characteristic.

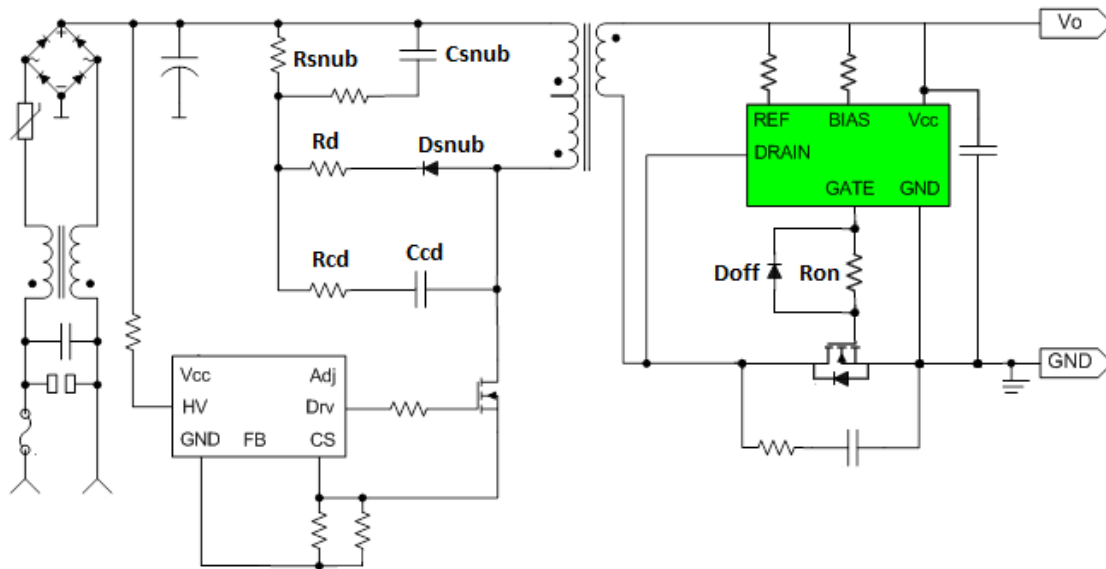


Figure 3: Techniques to prevent/reduce gate voltage oscillations

### Waveform and efficiency measurements

The operating waveforms of the controller can be measured using oscilloscope probes. If a current probe or transformer is also used to measure the MOSFET current, the wire length should be kept short to avoid excessive loop-inductance which could disturb the controller operation.

Figure 4 shows the operating waveforms in the Flyback converter inside a 19V 90W output power adaptor. The power adaptor also incorporates a boost power factor correction stage to comply with IEC61000-3-2.

The controller senses the forward voltage drop of the parasitic diode within the MOSFET, and when the diode is in conduction, applies a voltage to the MOSFET gate, turning on the MOSFET after an initial delay time. The gate output voltage of the controller is then proportional to the sensed voltage. In QR mode, the gate voltage is reduced as the MOSFET's Drain current decreases. This ensures that the MOSFET is turned off at the zero current point, with little or no reverse current. Another advantage is that this technique prevents early termination of the gate voltage at low Drain current. Early termination of gate voltage can reduce the efficiency due to body-diode conduction loss.

Figure 5 shows that 90% efficiency can be achieved in the 90W adaptor when using the evaluation board to drive a 10mΩ 100V synchronous MOSFET.

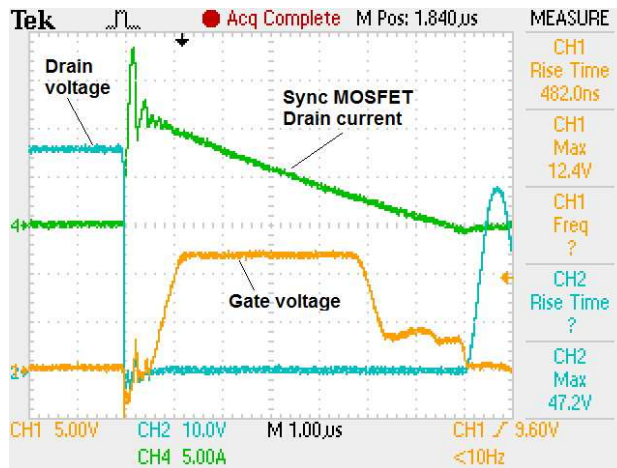


Figure 4: Operating waveforms in QR mode with a 10mΩ 100V synchronous MOSFET

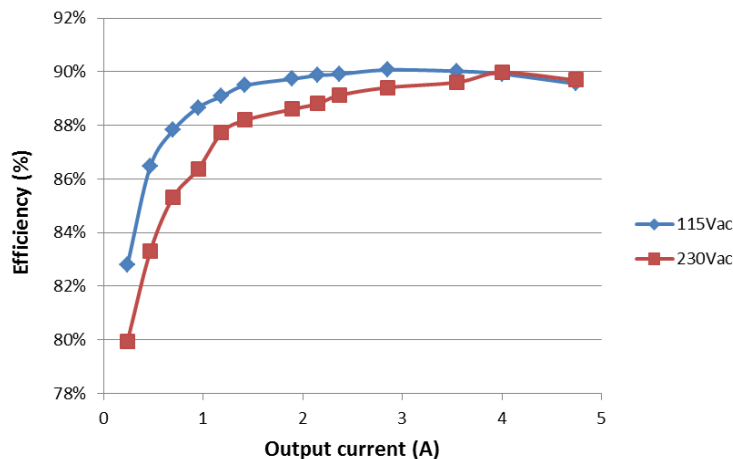



Figure 5: Efficiency measurement in a 19V 90W power adaptor

**Board schematic**

Figure 6 shows the circuit schematic of ZXGD3104EV2. Power for the controller is applied to the terminal block P1. A three way header, P2 is located at the other end of the board. The header allows the board to be soldered directly across a synchronous MOSFET in a TO220 package. The board can also be used with an SMD MOSFET by connecting the pin-outs accordingly.

The evaluation board is designed to accept a supply voltage of 19V, which is the typical output voltage of a laptop power adaptor. If the power supply's output voltage is required to be greater than 25V, a voltage regulator should be used to step down the high voltage to 19V before connecting to the evaluation board. The values of the threshold setting resistors, Rref and Rbias, are chosen for Vcc=19V. Please refer to the ZXGD3105N8 datasheet for more information.

DZ is an optional Zener diode connected to the BIAS pin of the controller to limit the maximum gate voltage to 12V. DZ is recommended when the controller is used to drive a high-gate-charge synchronous MOSFET or/and at high switching frequency. This configuration reduces the gate-charge switching loss.

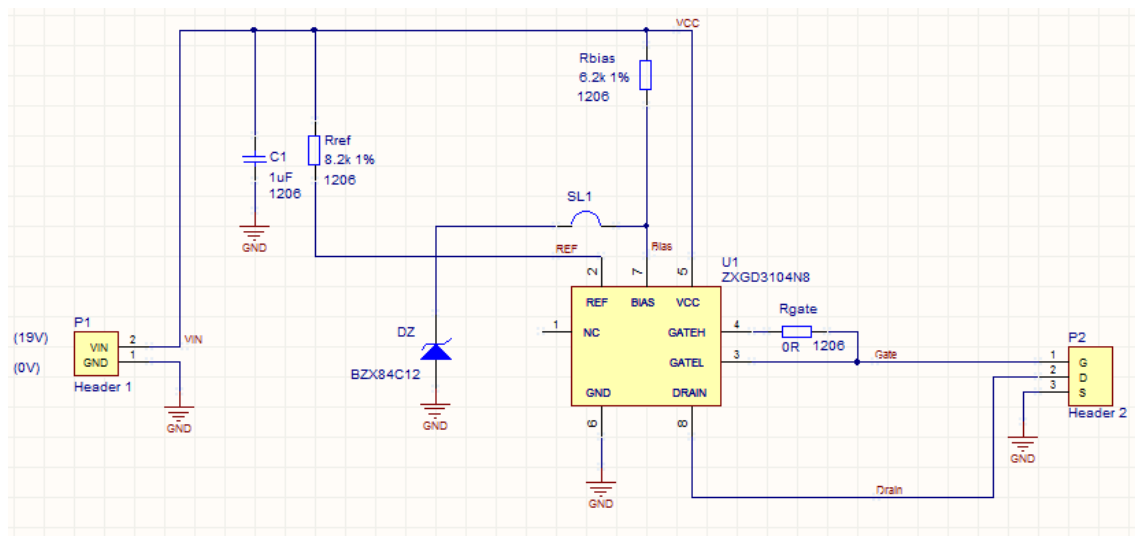

**Figure 6: Circuit diagram**

Please note that the component part numbers are given as a guide only. Due to continual component development, all parts quoted should be checked for suitability and availability with their respective manufacturers.

**Table 1: Part list**

Ref.	Value	Package	Part number	Manufacturer	Notes
U1	25V VCC max synchronous controller	SO8	ZXGD3104N8	Diodes Inc.	
DZ	12V Zener	SOT23	BZX84C12	Diodes Inc.	
C1	1µF 50V capacitor	1206	C1206X105K5R	Kemet	X7R
P1	2-way terminal				generic
P2	3-way header				generic
Rbias	6k2 resistor	1206	Generic		1%, 200ppm/°C
Rgate	0R resistor	1206	Generic		5%, 200ppm/°C
Rref	8k2 resistor	1206	Generic		1%, 200ppm/°C

INTENTIONALLY BLANK

INTENTIONALLY BLANK

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDING TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2011, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)

**Sales offices**

**The Americas**

3050 E. Hillcrest Drive  
Westlake Village,  
CA 91362-3154  
Tel: (+1) 805 446 4800  
Fax: (+1) 805 446 4850

**Europe**

Kustermannpark  
Balanstraße 59,  
D-81541 München  
Germany  
Tel: (+49) 894 549 490  
Fax: (+49) 894 549 4949

**Taiwan**

7F, No. 50,  
Min Chuan Road  
Hsin-Tien  
Taipei, Taiwan  
Tel: (+886) 289 146 000  
Fax: (+886) 289 146 639

**Shanghai**

Rm. 606, No.1158  
Changning Road  
Shanghai, China  
Tel: (+86) 215 241 4882  
Fax (+86) 215 241 4891

**Shenzhen**

Room A1103-04,  
ANLIAN Plaza, #4018  
Jintian Road  
Futian CBD,  
Shenzhen, China  
Tel: (+86) 755 882 849 88  
Fax: (+86) 755 882 849 99

**Korea**

6 Floor, Changhwa B/D,  
1005-5 Yeongtong-dong,  
Yeongtong-gu, Suwon-si,  
Gyeonggi-do, Korea 443-813  
Tel: (+82) 312 731 884  
Fax: (+82) 312 731 885