



| SYMBOLS | MIN. | NOM. | MAX. |
|---------|-----------|------|------|
| A | 0.70 | 0.75 | 0.80 |
| A1 | 0.00 | 0.02 | 0.05 |
| A3 | 0.20 REF. | | |
| b | 0.18 | 0.25 | 0.30 |
| D | 3.40 | 3.50 | 3.60 |
| E | 4.40 | 4.50 | 4.60 |
| e | 0.50 BSC | | |
| L | 0.30 | 0.40 | 0.50 |
| D2 | 1.95 | 2.05 | 2.15 |
| E2 | 2.95 | 3.05 | 3.15 |

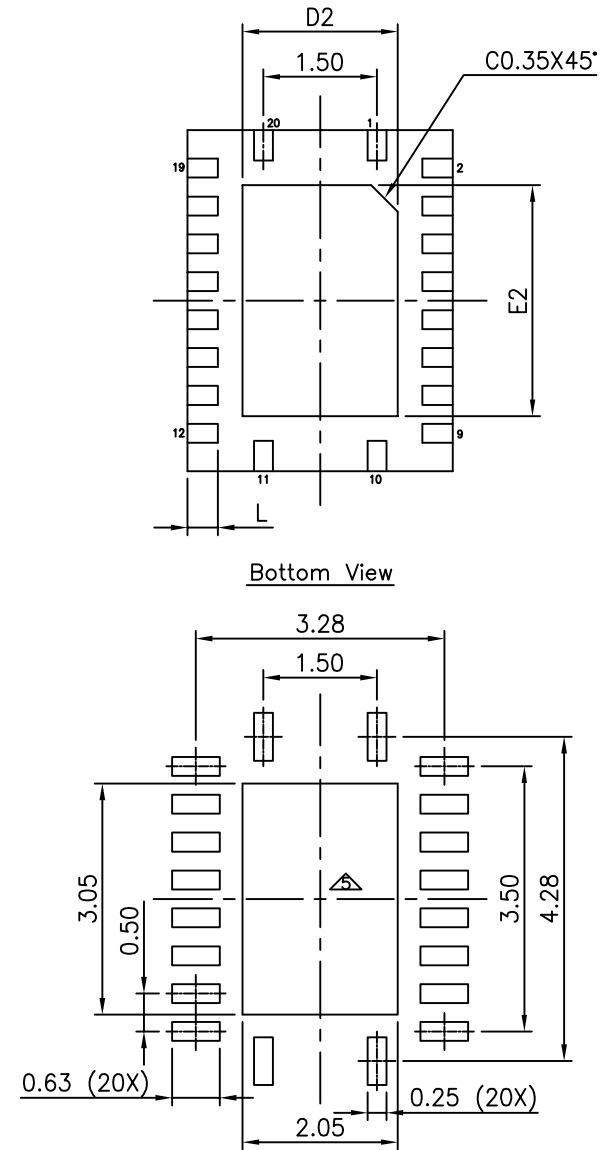

NOTE :

1. ALL DIMENSIONS ARE IN mm. ANGLES IN DEGREES.
2. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
3. REFER JEDEC MO-241.
4. RECOMMENDED LAND PATTERN IS FOR REFERENCE ONLY.
5. THERMAL PAD SOLDERING AREA (MESH STENCIL DESIGN IS RECOMMENDED)

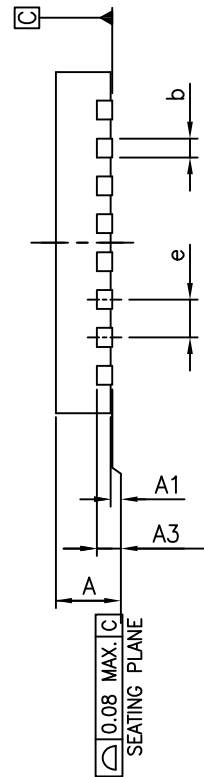

DATE: 05/31/23

DESCRIPTION: W-QFN3545-20

PACKAGE CODE: ZH (ZH20)

DOCUMENT CONTROL #: PD-2032

REVISION: C