

AN1165

LFPAK56/PowerDI5060 Compatible Footprint

Muhammad Zafar Kausar, Automotive Business Unit, Diodes Incorporated

This document compares the LFPAK56 package to Diodes Incorporated's PowerDI5060 package and provides a new footprint which can accommodate both devices while minimizing the copper area.

Note: Figures included in this document are not to scale. All dimensions given are in mm.

PowerDI5060 Footprint


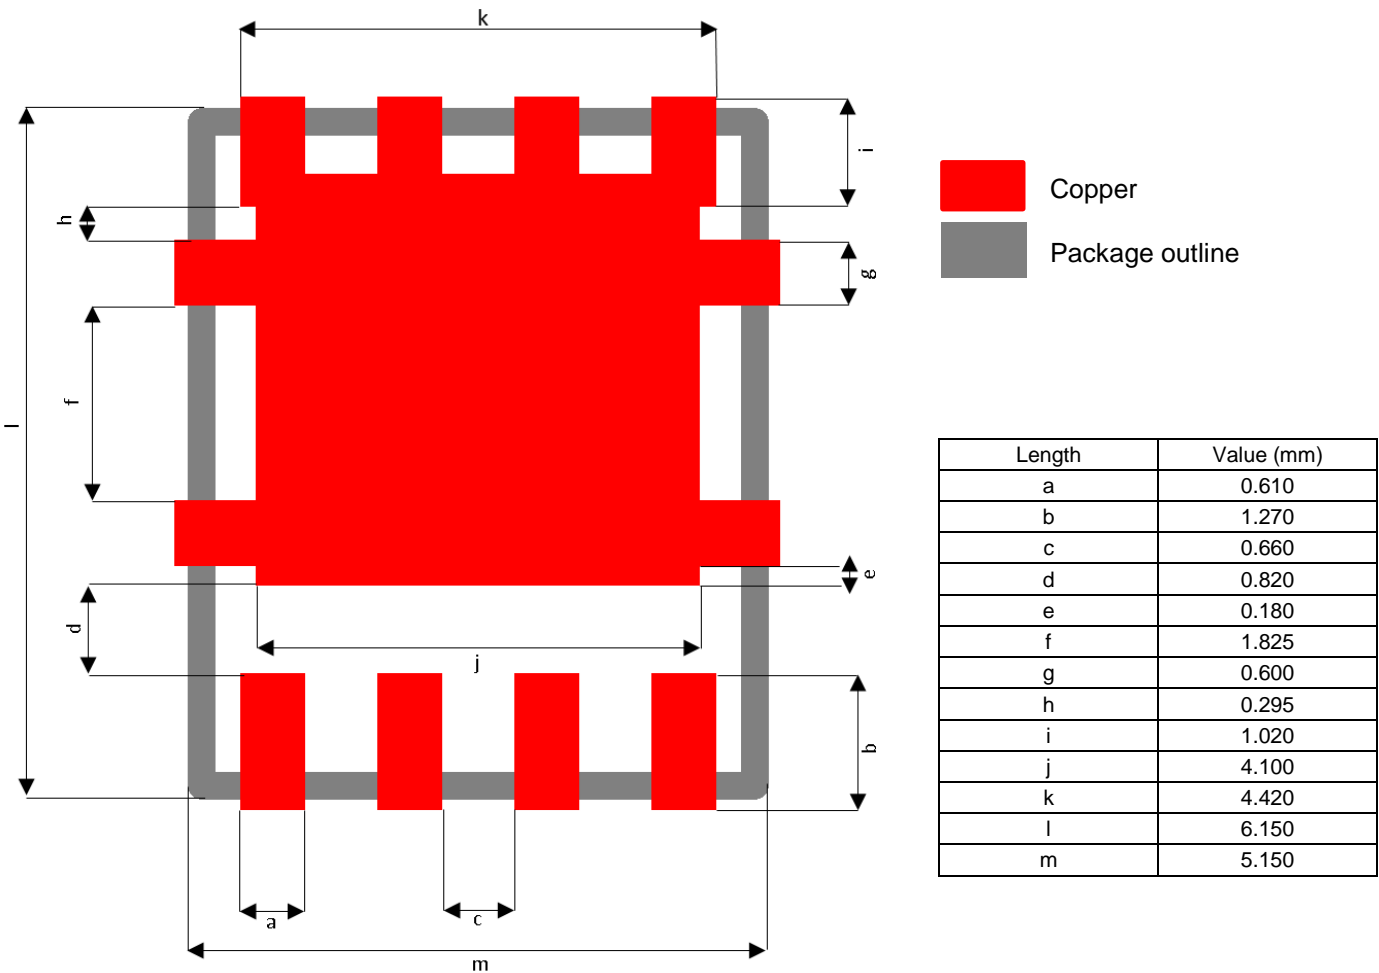


Figure 1: Diodes' PowerDI5060 footprint
Table 1: PowerDI5060 footprint dimensions

Diodes' PowerDI5060 footprint can be seen above. It shows four pins on top, which are all connected to the central drain tab. Three of the four pins at the bottom are connected to the source while the remaining pin is connected to the gate. The package outline has been shown in grey while the pads (copper area) are shown in red.

LFLPAK56 Footprint

The LFLPAK56 is similar, although instead of four exposed pins connecting to the drain, there is only one large pad, as shown below:

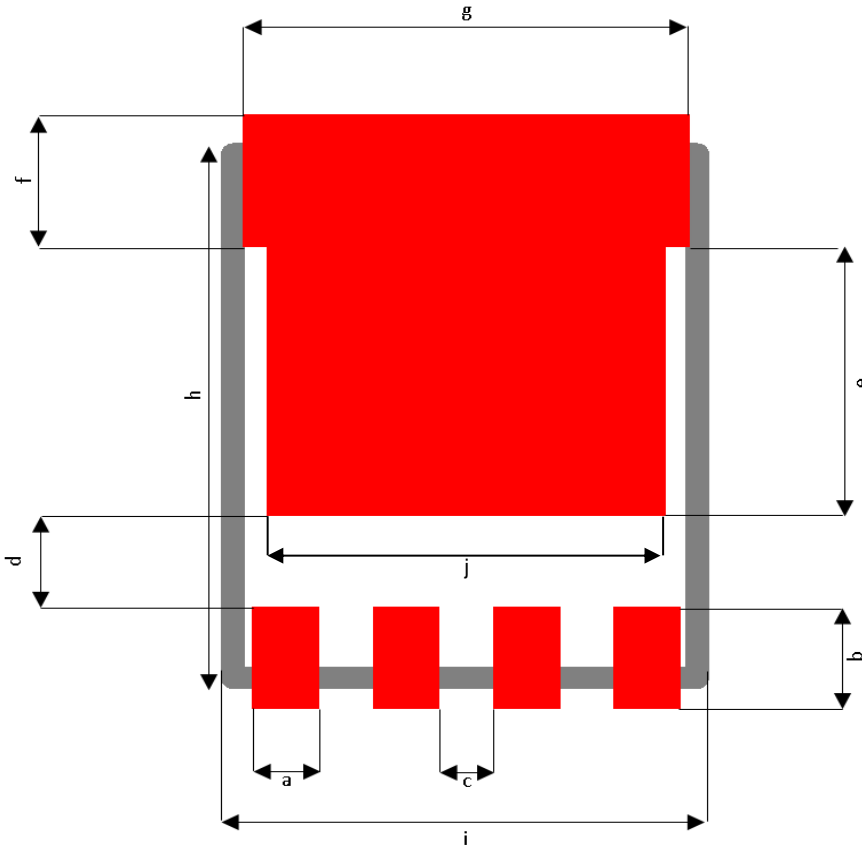

Length	Value (mm)
a	0.700
b	1.150
c	0.570
d	1.050
e	3.100
f	1.500
g	4.700
h	6.000
i	4.900
j	4.200

Figure 2: LFLPAK56 footprint
Table 2: LFLPAK56 footprint dimensions

Figures 1 and 2 show both footprints with their dimensions. The dimensions of both packages and their footprints are similar. To visualize and compare these better, Figure 3 below shows an overlapping image of both footprints.


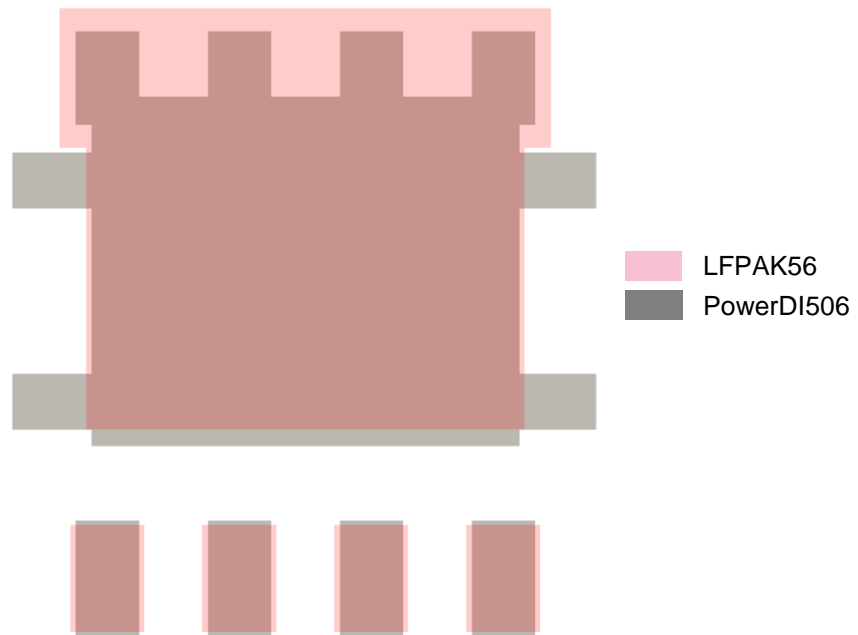


Figure 3: PowerDI5060 footprint overlapped with the LFLPAK56 footprint

Compatible Footprint

A compatible footprint was created by combining the two footprints above and making minor adjustments. The four drain pins in the PowerDI5060 were replaced with one large pad, as in the LFPAK56. The width of the central tab on the PowerDI5060 was increased to match the width of the LFPAK56. The widths and heights of the source and gate pins were also adjusted to accommodate both packages. The resulting footprint is shown below:

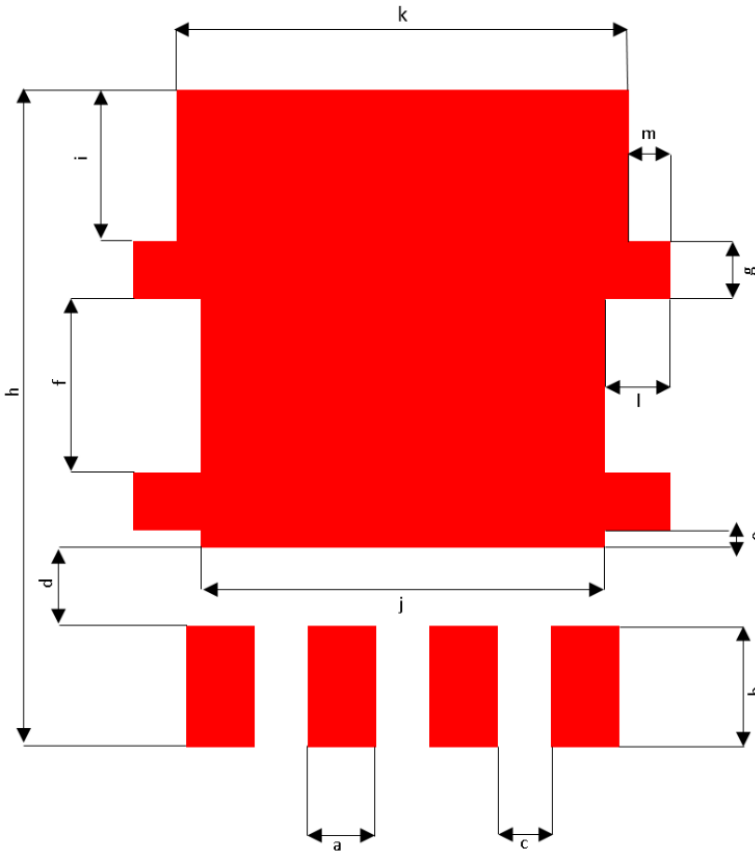

Length	Value (mm)
a	0.700
b	1.270
c	0.570
d	0.820
e	0.180
f	1.825
g	0.600
h	6.860
i	1.565
j	4.200
k	4.700
l	0.705
m	0.455

Figure 4: LFPAK56/PowerDI5060 compatible footprint
Table 3: Compatible footprint dimensions

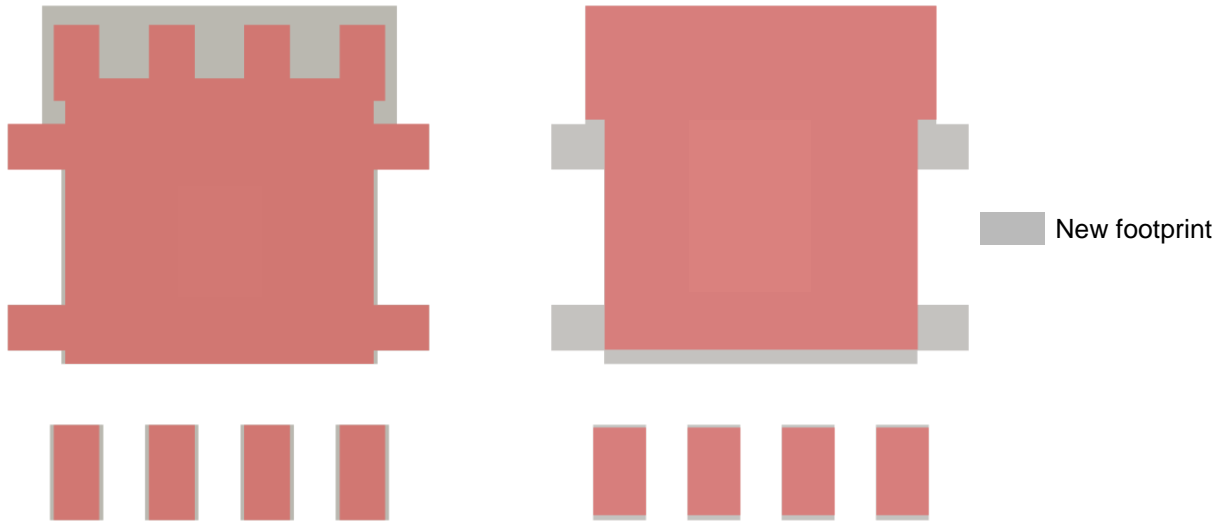


Figure 5: PowerDI5060 (left) and LFPAK56 (right) on new compatible footprint

As shown in Figure 5, both footprints are compatible with the new footprint. In Figures 6 and 7 below, both packages can be seen on the new footprint in the 3D view.

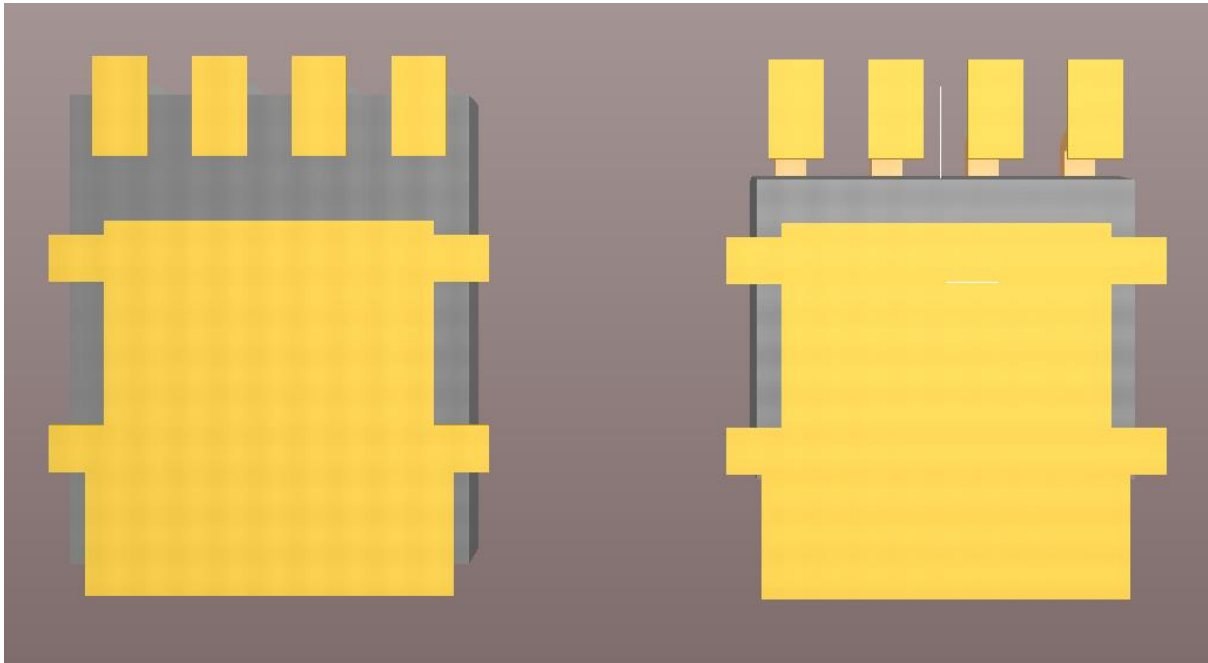


Figure 6: PowerDI5060 (left) and LFPAK56 (right) on new compatible footprint (top view)

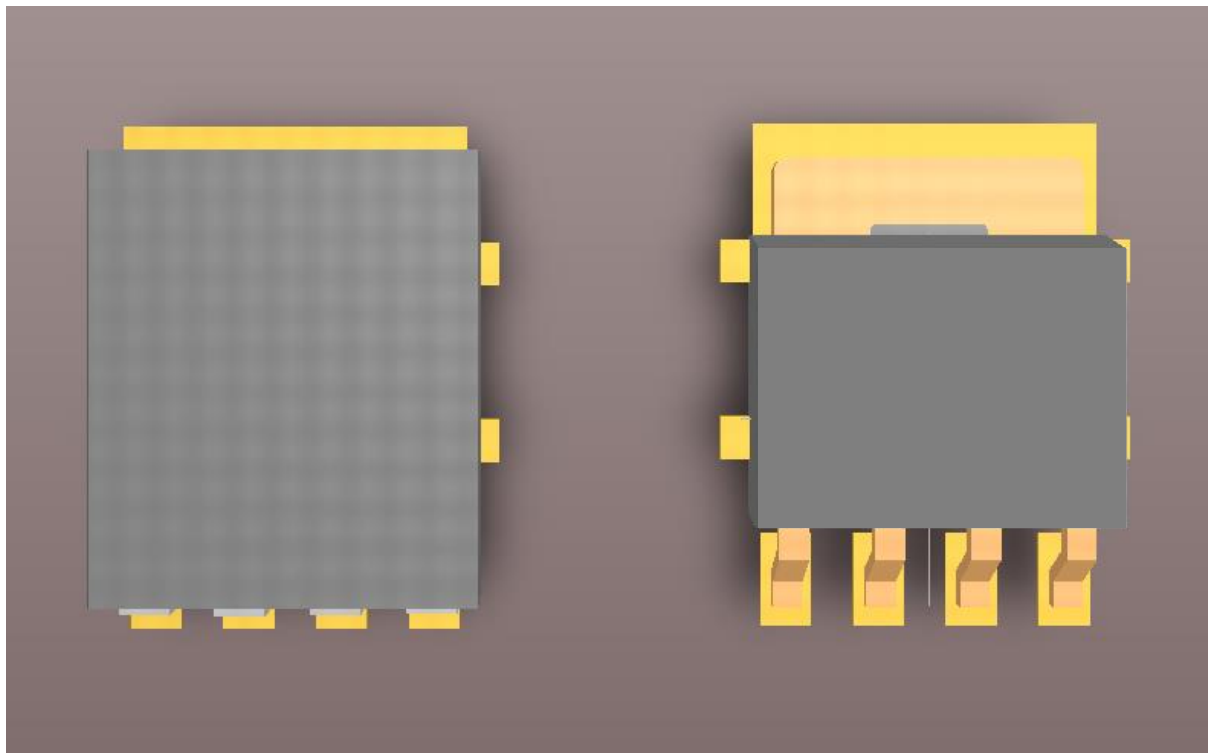


Figure 7: PowerDI5060 (left) and LFPAK56 (right) on new compatible footprint (bottom view)

IMPORTANT NOTICE

1. DIODES INCORPORATED AND ITS SUBSIDIARIES (“DIODES”) MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes’ websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes’ website) under this document.
5. Diodes products are provided subject to Diodes’ Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

www.diodes.com