

**DMMT5401** 

#### 150V PNP MATCHED PAIR HIGH-VOLTAGE TRANSISTOR IN SOT26

#### **Features**

- BVcEo > -150V
- I<sub>C</sub> = -200mA High Collector Current
- Pair of PNP Transistors That Are Intrinsically Matched (Note 1)
- 2% Matched Tolerance, hfe, VcE(sat), VBE(sat)
- Ideal for Medium Power Amplification and Switching
- Fully Internally Isolated in a Small Surface-Mount Package
- Epitaxial Planar Die Construction
- Totally Lead-Free & Fully RoHS Compliant (Notes 2 & 3)
- Halogen and Antimony Free. "Green" Device (Note 4)
- For automotive applications requiring specific change control (i.e.: parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please refer to the related automotive grade (Q-suffix) part. A listing can be found at


https://www.diodes.com/products/automotive/automotive-products/.

 This part is qualified to JEDEC standards (as references in AEC-Q) for High Reliability.

https://www.diodes.com/quality/product-definitions/

## **Mechanical Data**

- Package: SOT26
- Package Material: Molded Plastic. "Green" Molding Compound.
   UL Flammability Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads. Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.018 grams (Approximate)

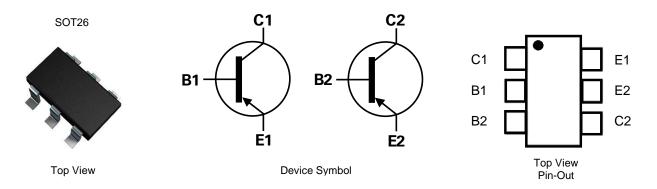


### **Ordering Information** (Note 5)

Part Number	Doolsone	Marking	Reel Size (inches)	Tape Width (mm)	Packing		
Part Number	Package	Marking	Reel Size (Iliches)	rape widin (ilili)	Qty.	Carrier	
DMMT5401-7-F	SOT26	K4S	7	8	3000	Reel	

Notes:

- 1. Intrinsically matched pair as this is built with adjacent die from the same wafer.
- 2. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 3. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 4. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 5. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

### **Marking Information**



K4S = Product Type Marking Code YM = Date Code Marking Y = Year (ex: L = 2024) M = Month (ex: 3 = March)

Date Code Key

Year	2005	-	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033
Code	S	-	L	М	Ν	Р	R	S	T	J	V	W
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec



### **Maximum Ratings** (@T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	Vсво	-160	V
Collector-Emitter Voltage	Vceo	-150	V
Emitter-Base Voltage	VEBO	-5	V
Collector Current	lc	-200	mA

# Thermal Characteristics (@TA = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Power Dissipation Total Device	(Notes 6 & 7)	PD	300	mW
Thermal Resistance, Junction to Ambient	(Note 6)	RθJA	417	°C/W
Thermal Resistance, Junction to Case	(Note 6)	Rejc	156	°C/W
Operating and Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C


## **Electrical Characteristics** (@T<sub>A</sub> = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition		
OFF CHARACTERISTICS (Note 8)								
Collector-Base Breakdown Voltage	ВУсво	-160	_	_	V	$I_C = -100\mu A$ , $I_E = 0$		
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	-150	_	_	V	$I_C = -1 \text{mA}, I_B = 0$		
Emitter-Base Breakdown Voltage	ВУЕВО	-5	_	_	V	$IE = -10\mu A$ , $IC = 0$		
Collector-Base Cutoff Current	I <sub>CBO</sub>	_	_	-50	nΑ μΑ	V <sub>CB</sub> = -120V, I <sub>E</sub> = 0 V <sub>CB</sub> = -120V, I <sub>E</sub> = 0, T <sub>A</sub> = +100°C		
Emitter-Base Cutoff Current	IEBO	_	_	-50	nA	$V_{EB} = -3V, I_{B} = 0$		
ON CHARACTERISTICS (Note 8)								
DC Current Gain (Note 9)	h <sub>FE</sub>	50 60 50		240		Ic = -1mA, VcE = -5V Ic = -10mA, VcE = -5V Ic = -50mA, VcE = -5V		
Collector-Emitter Saturation Voltage	VCE(sat)	_	_	-0.2 -0.5	٧	$I_C = -10mA$ , $I_B = -1mA$ $I_C = -50mA$ , $I_B = -5mA$		
Base-Emitter Saturation Voltage	V <sub>BE(sat)</sub>		_	-1	<b>V</b>	$I_C = -10mA$ , $I_B = -1mA$ $I_C = -50mA$ , $I_B = -5mA$		
SMALL SIGNAL CHARACTERISTICS								
Current Gain-Bandwidth Product	f⊤	100	_	300	MHz	Vce = -10V, Ic = -10mA, f = 100MHz		
Output Capacitance	Сово	1	_	6	рF	$V_{CB} = -10V$ , $f = 1.0MHz$ , $I_E = 0$		
Small Signal Current Gain	h <sub>fe</sub>	40	_	260		VcE = -10V, Ic = -1mA, f = 1.0kHz		
Noise Figure	NF	_	_	8	dB	$V_{CE}$ = -5V, $I_{C}$ = -200 $\mu$ A, $R_{S}$ = 10 $\Omega$ , $f$ = 1.0kHz		


Notes:

- 6. For a device mounted on minimum recommended pad layout with 1oz copper that is on a single-sided 1.6mm FR-4 PCB; the device is measured under still air conditions whilst operating in a steady state.
- Maximum combined dissipation.
- 8. Short duration pulse test used to minimize self-heating effect.
- 9. The DC Current Gain, h<sub>FE</sub>, (matched at I<sub>C</sub> = -10mA and V<sub>CE</sub> = -5V) Collector Emitter Saturation Voltage, V<sub>CE(sat)</sub>, and Base Emitter Saturation Voltage, V<sub>BE(sat)</sub> are matched with typical matched tolerances of 1% and maximum of 2%.












Fig. 2 Typical DC Current Gain vs. Collector Current





Fig. 4 Typical Base-Emitter Turn-On Voltage vs. Collector Current



## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

### SOT26

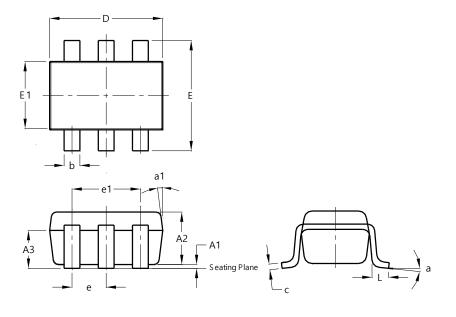


SOT26						
Dim	Min	Max	Тур			
A1	0.013	0.10	0.05			
A2	1.00	1.30	1.10			
А3	0.70	0.80	0.75			
b	0.35	0.50	0.38			
С	0.10	0.20	0.15			
D	2.90	3.10	3.00			
е	-	-	0.95			
e1	-	-	1.90			
Е	2.70	3.00	2.80			
E1	1.50	1.70	1.60			
L	0.35	0.55	0.40			
а	-	-	8°			
a1	-	-	7°			
All	Dimen	sions	in mm			

# **Suggested Pad Layout**

Please see http://www.diodes.com/package-outlines.html for the latest version.

### SOT26



Dimensions	Value (in mm)
С	2.40
C1	0.95
G	1.60
Х	0.55
Y	0.80
V1	3.20



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
- 9. This Notice may be periodically updated with the most recent version available at <a href="https://www.diodes.com/about/company/terms-and-conditions/important-notice">https://www.diodes.com/about/company/terms-and-conditions/important-notice</a>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries. All other trademarks are the property of their respective owners.

© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com