



### **N-CHANNEL ENHANCEMENT MODE MOSFET**

### **Product Summary**

BV <sub>DSS</sub>	Rds(on) Max	I <sub>D</sub> Max T <sub>A</sub> = +25°C		
20V	0.4Ω @ V <sub>GS</sub> = 4.5V	1.0A		
	0.5Ω @ V <sub>GS</sub> = 2.5V	0.9A		
	0.7Ω @ V <sub>GS</sub> = 1.8V	0.8A		

## **Description and Applications**

This MOSFET is designed to minimize the on-state resistance (RDS(ON)) yet maintain superior switching performance, making it ideal for high-efficiency power management applications.

Load Switch

### **Features and Benefits**

- Footprint of just 0.6mm<sup>2</sup> Thirteen Times Smaller than SOT23
- 0.4mm Profile Ideal for Low Profile Applications
- Low Gate Threshold Voltage
- Fast Switching Speed
- ESD Protected Gate
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The DMN2450UFB4Q is suitable for automotive applications requiring specific change control; this part is AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.

https://www.diodes.com/quality/product-definitions/

### **Mechanical Data**

- Case: X2-DFN1006-3
- Case Material: Molded Plastic, "Green" Molding Compound.
  UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish NiPdAu over Copper Lead-Frame. Solderable per MIL-STD-202, Method 208 (4)
- Weight: 0.001 grams (Approximate)


X2-DFN1006-3




ESD Protected Gate



**Bottom View** 



Top View Internal Schematic



**Equivalent Circuit** 

### Ordering Information (Note 4)


Part Number	Marking	Reel Size (inches)	Tape Width (mm)	Tape Pitch (mm)	Quantity per Reel
DMN2450UFB4Q-7B	45	7	8	2	10,000
DMN2450UFB4Q-7R	45	7	8	4	3,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/



## **Marking Information**

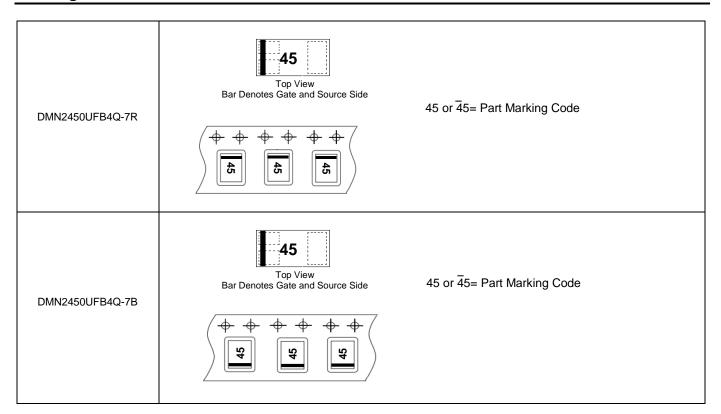



## Maximum Ratings (@ T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic			Symbol	Value	Unit
Drain-Source Voltage			VDSS	20	V
Gate-Source Voltage			$V_{GSS}$	±12	V
Continuous Drain Current (Note 6) $V_{GS} = 4.5V$ Steady $T_{A} = +25^{\circ}C$ State $T_{A} = +70^{\circ}C$			l In	1.0 0.8	А
Pulsed Drain Current (10µs Pulse, Duty Cycle = 1%)			I <sub>DM</sub>	3.0	A

# Thermal Characteristics (@ TA = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Total Power Dissipation (Note 5)	PD	0.5	W
Thermal Resistance, Junction to Ambient (Note 5)	R <sub>θJA</sub>	225	°C/W
Total Power Dissipation (Note 6)	PD	0.9	W
Thermal Resistance, Junction to Ambient (Note 6)	R <sub>θ</sub> JA	129	°C/W
Operating and Storage Temperature Range	TJ, TSTG	-55 to +150	°C


# **Electrical Characteristics** (@ T<sub>A</sub> = +25°C, unless otherwise specified.)

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition	
OFF CHARACTERISTICS (Note 7)							
Drain-Source Breakdown Voltage	BVDSS	20		_	V	$V_{GS} = 0V, I_{D} = 250\mu A$	
Zero Gate Voltage Drain Current TJ = +25°C	IDSS	_		100	nA	V <sub>DS</sub> = 20V, V <sub>GS</sub> = 0V	
Gate-Source Leakage	lgss	I	_	±1.0	μA	$V_{GS} = \pm 4.5V, V_{DS} = 0V$	
ON CHARACTERISTICS (Note 7)							
Gate Threshold Voltage	Vgs(TH)	0.5	_	0.9	V	$V_{DS} = V_{GS}$ , $I_D = 250\mu A$	
		1	0.3	0.4	Ω	$V_{GS} = 4.5V, I_{D} = 600mA$	
Static Drain-Source On-Resistance	R <sub>DS(ON)</sub>	l	0.4	0.5		$V_{GS} = 2.5V, I_D = 500mA$	
		I	0.5	0.7		$V_{GS} = 1.8V, I_{D} = 350mA$	
Diode Forward Voltage	VsD	_	0.7	1.2	V	V <sub>G</sub> S = 0V, I <sub>S</sub> = 150mA	
DYNAMIC CHARACTERISTICS (Note 8)							
Input Capacitance	Ciss	1	56	_	pF	101/11/	
Output Capacitance	Coss	1	19	_	pF	V <sub>DS</sub> =16V, V <sub>GS</sub> = 0V, -f = 1.0MHz	
Reverse Transfer Capacitance	Crss	_	7.3	_	pF	-1 = 1.0WH2	
Gate Resistance	Rg	_	86	_	Ω	$V_{DS} = 0V$ , $V_{GS} = 0V$	
Total Gate Charge (V <sub>GS</sub> = 4.5V)	Qg	_	0.6	_	nC		
Total Gate Charge (V <sub>GS</sub> = 10V)	Qg	_	1.3	_	nC	10)/ 1 050 1	
Gate-Source Charge	Qgs	_	0.1	_	nC	V <sub>DS</sub> = 10V, I <sub>D</sub> = 250mA	
Gate-Drain Charge	Qgd	_	0.16	_	nC	7	
Turn-On Delay Time	t <sub>D</sub> (ON)		5.3	_	ns	101/11/	
Turn-On Rise Time			2.6	_	ns	$V_{DD} = 10V, V_{GS} = 4.5V,$	
Turn-Off Delay Time	tD(OFF)		18.1	_	ns	$R_L = 47\Omega$ , $R_g = 10\Omega$ ,	
Turn-Off Fall Time	t <sub>F</sub>	_	6.6	_	ns	I <sub>D</sub> = 200mA	

Notes:

- Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.
  Device mounted on FR-4 substrate PC board, 2oz copper, with 25mm X 25mm square copper plate.
  Short duration pulse test used to minimize self-heating effect.
  Guaranteed by design. Not subject to product testing.



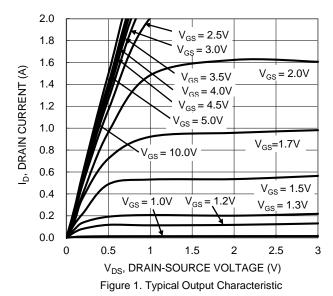

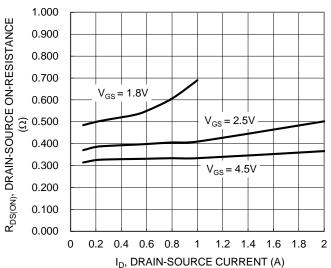


Figure 3. Typical On-Resistance vs. Drain Current and Gate Voltage

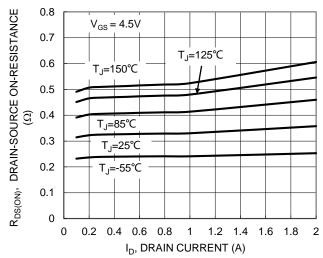


Figure 5. Typical On-Resistance vs. Drain Current and Temperature


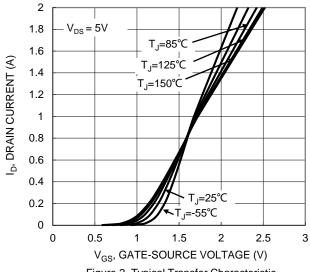


Figure 2. Typical Transfer Characteristic

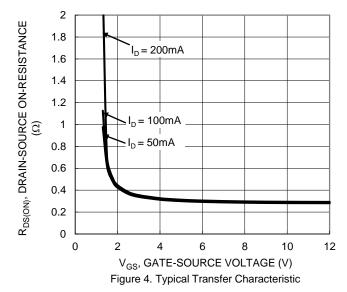

2  $V_{GS} = 4.5V, I_{D} = 200mA$ 1.8 1.6

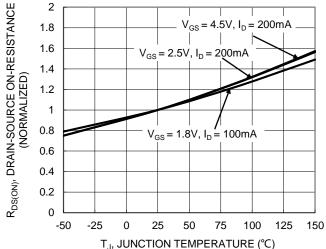


Figure 6. On-Resistance Variation with Temperature



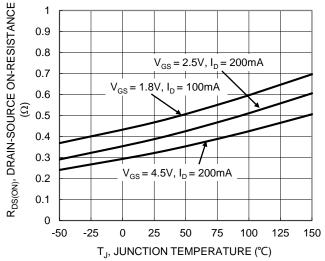


Figure 7. On-Resistance Variation with Temperature

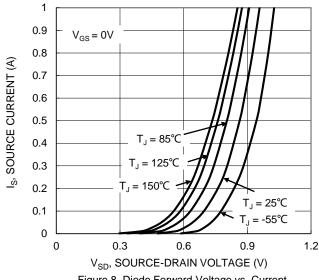


Figure 8. Diode Forward Voltage vs. Current

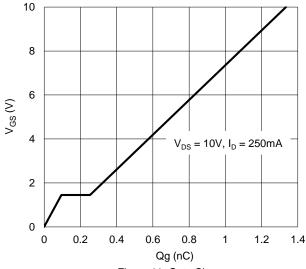


Figure 11. Gate Charge

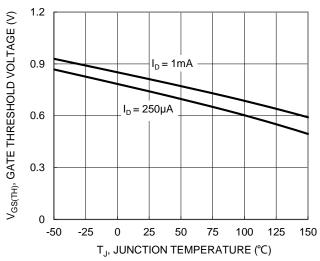


Figure 8. Gate Threshold Variation vs. Junction Temperature

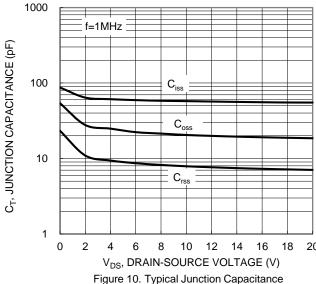


Figure 10. Typical Junction Capacitance

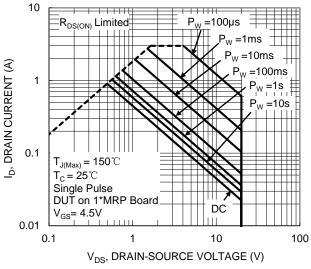


Figure 12. SOA, Safe Operation Area



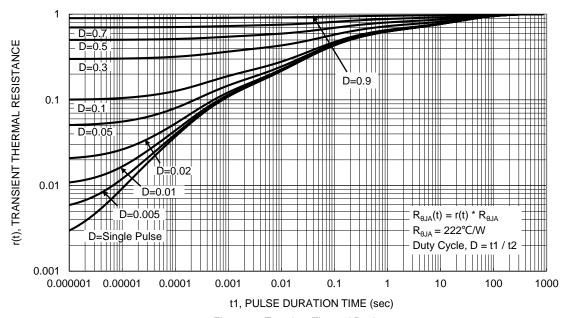



Figure 13. Transient Thermal Resistance



## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

### X2-DFN1006-3

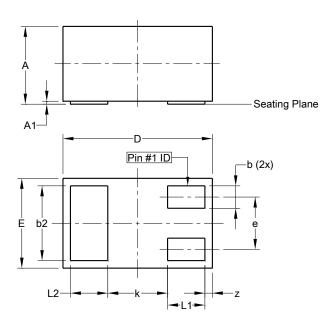


X2-DFN1006-3					
Dim	Min	Max	Тур		
Α		0.40			
A1	0.00	0.05	0.03		
b	0.10	0.20	0.15		
b2	0.45	0.55	0.50		
D	0.95	1.05	1.00		
Е	0.55	0.65	0.60		
е			0.35		
L1	0.20	0.30	0.25		
L2	0.20	0.30	0.25		
k	_	_	0.40		
Z	0.02	0.08	0.05		
All Dimensions in mm					

## **Suggested Pad Layout**

 $\label{prop:lease} Please see \ http://www.diodes.com/package-outlines.html for the latest version.$ 

#### X2-DFN1006-3

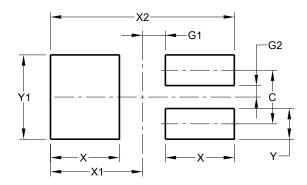

Dimensions	Value (in mm)			
С	0.350			
G1	0.150			
G2	0.075			
Х	0.450			
X1	0.600			
X2	1.200			
Y	0.200			
Y1	0.550			



#### IMPORTANT NOTICE

- 1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- 2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- 3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
- 4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- 5. Diodes products are provided subject to Diodes' Standard Terms and Conditions of Sale (<a href="https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/">https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/</a>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- 6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- 7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- 8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

www.diodes.com