



DMT10H4M5LPS

#### **100V N-CHANNEL ENHANCEMENT MODE MOSFET**

#### **Product Summary**

BV <sub>DSS</sub>	R <sub>DS(ON)</sub> Max	I <sub>D</sub> Max T <sub>C</sub> = +25°C (Note 9)
100V	4.3mΩ @ V <sub>GS</sub> = 10V	100A

### Description

This new generation N-Channel Enhancement Mode MOSFET is designed to minimize  $R_{DS(ON)}$ , yet maintain superior switching performance. This device is ideal for use in notebook battery power management and load switch.

## Applications

- Motor Control
- DC-DC Converters
- Power Management

PowerDI5060-8 (Standard)




Bottom View



- 100% Unclamped Inductive Switching (UIS) Test in Production Ensures More Reliable and Robust End Application
- High Conversion Efficiency
- Low R<sub>DS(ON)</sub> Minimizes On-State Losses
- Low Input Capacitance
- Fast Switching Speed
- Lead-Free Finish; RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)

## **Mechanical Data**

- Case: PowerDI<sup>®</sup>5060-8
- Case Material: Molded Plastic, "Green" Molding Compound.
  UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminal Connections Indicator: See Diagram
- Terminals: Finish Matte Tin Annealed over Copper Leadframe. Solderable per MIL-STD-202, Method 208 (3)
- Weight: 0.097 grams (Approximate)



Internal Schematic

s [ ] D s [ ] D s [ ] D g [ ] D g [ ] D Top View Pin Configuration

#### Ordering Information (Note 4)

Part Number	Case	Packaging
DMT10H4M5LPS-13	PowerDI5060-8 (Standard)	2,500/Tape & Reel

Pin1

EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
 See http://www.diodes.com/quality/lead\_free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

4. For packaging details, go to our website athttps://www.diodes.com/design/support/packaging/diodes-packaging/.

# **Marking Information**

Notes:



);; = Manufacturer's Marking 10H4M5LS = Product Type Marking Code YYWW = Date Code Marking YY or  $\underline{YY}$ = Last Two Digits of Year (ex: 19 = 2019) WW or  $\underline{WY}$ = Week Code (01 to 53)



# **Maximum Ratings** ( $@T_A = +25^{\circ}C$ , unless otherwise specified.)

Characteristic	Symbol	Value	Unit		
Drain-Source Voltage	V <sub>DSS</sub>	100	V		
Gate-Source Voltage			V <sub>GSS</sub>	±20	V
	Steady	T <sub>A</sub> = +25°C	- I <sub>D</sub> -	19	•
Continuous Drain Current, V <sub>GS</sub> = 10V (Note 5)	State	T <sub>A</sub> = +70°C		15	A
	Steady State	T <sub>C</sub> = +25°C	ID	100	
Continuous Drain Current, $V_{GS} = 10V$ (Note 6)		$T_C = +70^{\circ}C$		100	A
		(Note 9)			
Pulsed Drain Current (10µs Pulse, T <sub>C</sub> =+25°C, Package Lir		I <sub>DM</sub>	400	A	
Maximum Continuous Body Diode Forward Current (Note	Is	100	A		
Pulsed Body Diode Forward Current (10µs Pulse, Tc=+25°C, Package Limited)			I <sub>SM</sub>	400	A
Avalanche Current (Note 7) L=0.3mH			I <sub>AS</sub>	40	A
Avalanche Energy (Note 7) L=0.3mH			EAS	240	mJ

## **Thermal Characteristics**

Characteristic		Symbol	Value	Unit
Total Power Dissipation (Note 5)	$T_A = +25^{\circ}C$	PD	2.3	W
Thermal Resistance, Junction to Ambient (Note 5)		R <sub>0JA</sub>	54	°C/W
Total Power Dissipation (Note 6)	$T_{C} = +25^{\circ}C$	PD	113	W
Thermal Resistance, Junction to Case (Note 6)		R <sub>θJC</sub>	1.1	°C/W
Operating and Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C

### Electrical Characteristics (@T<sub>A</sub> = +25°C, unless otherwise specified.)


					1		
Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition	
OFF CHARACTERISTICS (Note 7)							
Drain-Source Breakdown Voltage	BV <sub>DSS</sub>	100	_	_	V	$V_{GS} = 0V, I_{D} = 10mA$	
Zero Gate Voltage Drain Current	I <sub>DSS</sub>		_	1	μA	$V_{DS} = 80V, V_{GS} = 0V$	
Gate-Source Leakage	I <sub>GSS</sub>		_	±100	nA	$V_{GS} = \pm 20V, V_{DS} = 0V$	
ON CHARACTERISTICS (Note 7)							
Gate Threshold Voltage	V <sub>GS(TH)</sub>	1.3	_	2.5	V	$V_{DS} = V_{GS}, I_D = 250 \mu A$	
Static Drain-Source On-Resistance		-	3.5	4.3	mΩ	$V_{GS} = 10V, I_D = 30A$	
	R <sub>DS(ON)</sub>		4.7	6.2	11122	$V_{GS} = 4.5V, I_D = 20A$	
Diode Forward Voltage	V <sub>SD</sub>	_	—	1.2	V	$V_{GS} = 0V, I_{S} = 30A$	
DYNAMIC CHARACTERISTICS (Note 8)							
Input Capacitance	Ciss	_	4843		pF	$V_{DS} = 50V, V_{GS} = 0V$ f = 1MHz	
Output Capacitance	Coss	_	1302	_			
Reverse Transfer Capacitance	C <sub>rss</sub>	_	25.5	_			
Gate Resistance	Rg		2.1	_	Ω	$V_{DS} = 0V, V_{GS} = 0V, f = 1MHz$	
Total Gate Charge	Qg	_	80	_			
Gate-Source Charge	Q <sub>gs</sub>	_	14	_	nC	$V_{DD} = 50V, I_D = 30A,$ $V_{GS} = 10V$	
Gate-Drain Charge	Q <sub>gd</sub>	_	18	_			
Turn-On Delay Time	t <sub>D(ON)</sub>	_	9	_		$V_{DD} = 50V, V_{GS} = 10V,$ $I_D = 30A, R_g = 4.7\Omega, R_L=1.1\Omega$	
Turn-On Rise Time	t <sub>R</sub>	_	26	_	ns		
Turn-Off Delay Time	t <sub>D(OFF)</sub>	—	76	_			
Turn-Off Fall Time	tF	_	50				
Reverse Recovery Time	t <sub>RR</sub>	_	63		ns	$I_{-} = 22.54$ di/dt = 1004/up	
Reverse Recovery Charge	Q <sub>RR</sub>	_	133		nC	I <sub>F</sub> = 22.5A, di/dt = 100A/μs	

Notes: 5. Device mounted on FR-4 PC board, with minimum recommended pad layout, single sided.

Device mounted on PK-4 PC board, with minimum recommended bad ayout, si
 Thermal resistance from junction to soldering point (on the exposed drain pad).
 Short duration pulse test used to minimize self-heating effect.
 Guaranteed by design. Not subject to product testing.
 Package limited.




#### DMT10H4M5LPS

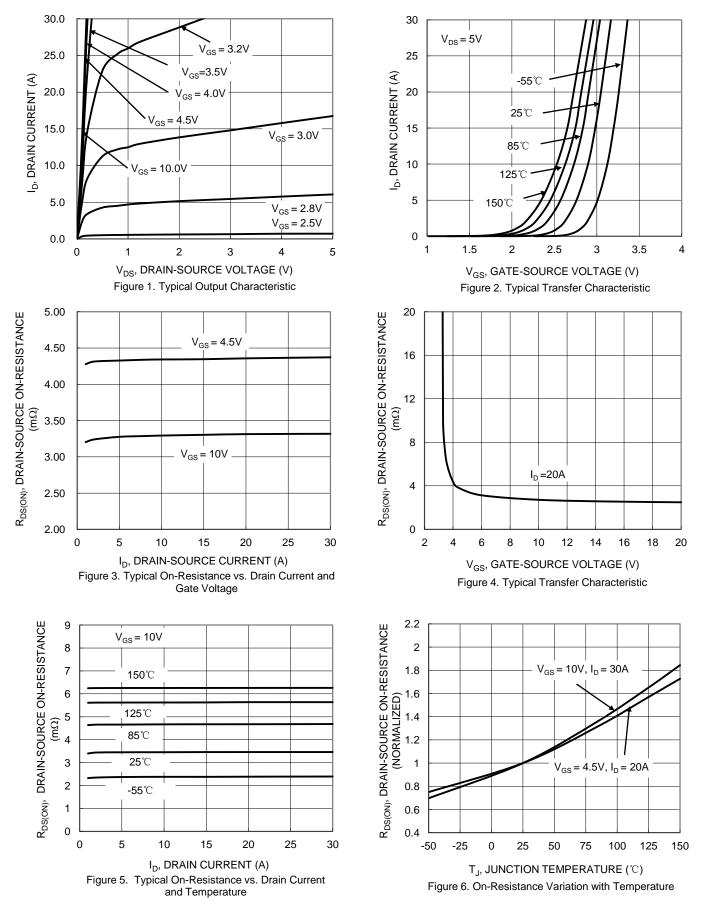



DMT10H4M5LPS Document number: DS41337 Rev. 3 - 2




#### DMT10H4M5LPS

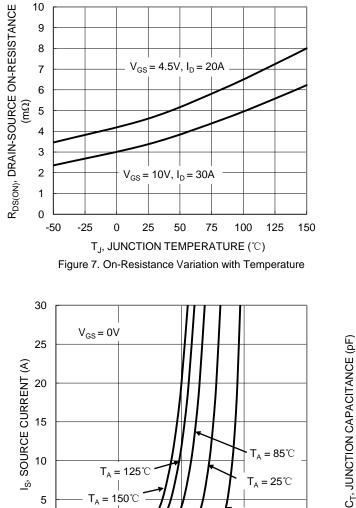








JunctionTemperature







Figure 12. SOA, Safe Operation Area






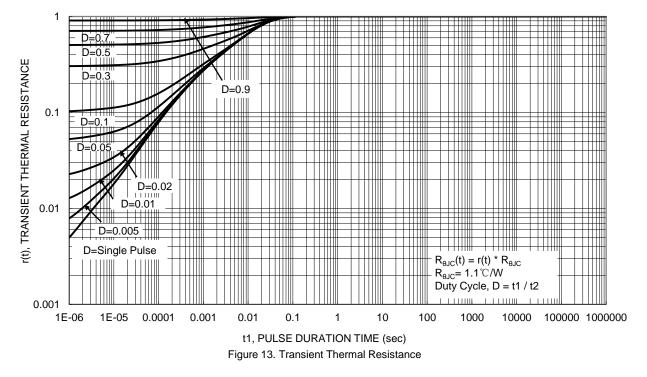

## **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

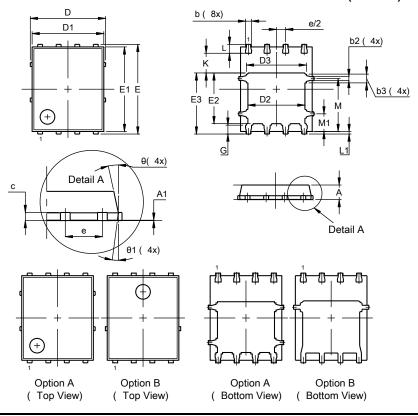


#### PowerDI5060-8 (Standard)

PowerDI5060-8 (Standard)					
Dim	Min	Max	Тур		
Α	0.90	1.20			
A1	0.00	0.05	-		
b	0.33	0.51			
b2	0.200	0.350			
b3	0.40	0.80	0.60		
C	0.230	0.354			
D (Option A)	5.	15 BSC			
D (Option B)		30 BSC			
D1	4.70	5.40			
D2	3.70	4.25			
D3	3.90	4.70			
E	6.	15 BSC			
E1	5.60	6.06			
E2	3.28	3.92			
E3	3.99	4.39			
e	1.27 BSC				
G	0.40	0.71			
к	0.51	1.45	-		
L	0.38	0.71			
L1	0.100	0.200			
М	3.235	4.035			
M1	1.00	1.40	1.21		
θ	8º	12º			
θ1	6°	8º	7°		
All Dimensions in mm					

### Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.



#### PowerDI5060-8 (Standard)

Dimensions	Value (in mm)
С	1.270
G	0.660
G1	0.820
Х	0.610
X1	4.300
X2	0.755
Х3	4.420
X4	5.610
Y	1.270
Y1	0.600
Y2	1.020
Y3	0.295
Y4	1.825
Y5	4.100
Y6	0.180
Y7	6.610



#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2019, Diodes Incorporated

www.diodes.com