PNP PRE-BIASED DUAL TRANSISTOR IN SOT363

Features

- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDC)
- Built-In Biasing Resistors
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **The DDA (XXXX) UQ are suitable for automotive applications requiring specific change control; these parts are AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.**
  https://www.diodes.com/quality/product-definitions/

Mechanical Data

- Package: SOT363
- Package Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish – Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 e3
- Weight: 0.006 grams (Approximate)

Part Number	R1 (NOM)	R2 (NOM)
DDA124EU	22kΩ	22kΩ
DDA144EU	47kΩ	47kΩ
DDA114YU	10kΩ	47kΩ
DDA123JU	2.2kΩ	47kΩ
DDA114EU	10kΩ	10kΩ

Part Number	R1 Only
DDA113TU	1kΩ
DDA143TU	4.7kΩ
DDA114TU	10kΩ

SOT363



Top View



R1, R2



R1 Only

Device Schematic

Ordering Information (Notes 4, 5)

Orderable Part Number	Status	Package	Marking	Reel Size (inches)	Tape Width (mm)	Packing	
						Qty.	Carrier
DDA124EU-7-F	Active	SOT363	P17	7	8	3,000	Reel
DDA124EUQ-7-F	Active	SOT363	P17	7	8	3,000	Reel
DDA124EUQ-13-F	Active	SOT363	P17	13	8	10,000	Reel
DDA144EU-7-F	Active	SOT363	P20	7	8	3,000	Reel
DDA144EUQ-7-F	Active	SOT363	P20	7	8	3,000	Reel
DDA114YU-7-F	Active	SOT363	P14	7	8	3,000	Reel
DDA114YUQ-7-F	NRND (Use ADA114YUQ)	SOT363	P14	7	8	3,000	Reel
DDA123JU-7-F	Active	SOT363	P06	7	8	3,000	Reel
DDA114EU-7-F	Active	SOT363	P13	7	8	3,000	Reel
DDA114EUQ-7-F	NRND (Use ADA114EUQ)	SOT363	P13	7	8	3,000	Reel
DDA113TU-7-F	Active	SOT363	P01	7	8	3,000	Reel
DDA143TU-7-F	Active	SOT363	P07	7	8	3,000	Reel
DDA143TUQ-7-F	Active	SOT363	P07	7	8	3,000	Reel
DDA143TUQ-13-F	Active	SOT363	P07	13	8	10,000	Reel
DDA114TU-7-F	Active	SOT363	P12	7	8	3,000	Reel
DDA114TUQ-7-F	Active	SOT363	P12	7	8	3,000	Reel
DDA114TUQ-13-F	Active	SOT363	P12	13	8	10,000	Reel

Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.
5. NRND = Not Recommended for New Design.

Marking Information



Pxx = Product Type Marking Code (See *Ordering Information*)
YM = Date Code Marking
Y or $\overline{Y}$= Year (ex: M = 2025)
M = Month (ex: O = October)

Date Code Key

Year	2002	-	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034
Code	O	-	M	N	P	R	S	T	U	V	W	X

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Supply Voltage (1) to (6) and (4) to (3)		V_{CC}	-50	V
Input Voltage (1) to (2) and (4) to (5)	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU DDA113TU DDA143TU DDA114TU	V_{IN}	+10 to -40 +10 to -40 +6 to -40 +5 to -12 +10 to -40 +5V Max +5V Max +5V Max	V
Output Current	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU DDA113TU DDA143TU DDA114TU	I_O	-30 -30 -70 -100 -50 -100 -100 -100	mA
Output Current		$I_{C(max)}$	-100	mA

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Power Dissipation (Notes 6, 7)	P_D	200	mW
Thermal Resistance, Junction to Ambient Air (Note 6)	$R_{\theta JA}$	625	°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

Notes: 6. Mounted on FR-4 PC Board with minimum recommended pad layout.
7. 150mW per element must not be exceeded.

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic (DDA113TU & DDA143TU & DDA114TU Only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_{CBO}	-50	—	—	V	I_C = -50µA
Collector-Emitter Breakdown Voltage	BV_{CEO}	-50	—	—	V	I_C = -1mA
Emitter-Base Breakdown Voltage	BV_{EBO}	-5	—	—	V	I_E = -50µA
Collector Cutoff Current	I_{CBO}	—	—	-0.5	µA	V_{CB} = -50V
Emitter Cutoff Current	I_{EBO}	—	—	-0.5	µA	V_{EB} = -4V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	—	—	-0.3	V	I_C/I_B = -2.5mA / -0.25mA DDA143TU I_C/I_B = -1mA / -0.1mA DDA114TU I_C/I_B = -10mA / -1mA DDA113TU
DC Current Transfer Ratio	h_{FE}	100 160	250 —	600 600	—	I_C = -1mA, V_{CE} = -5V I_C = -1mA, V_{CE} = -5V DDA143TU/Q
Input Resistor (R_1) Tolerance	ΔR_1	-30	—	+30	%	—
Gain-Bandwidth Product (Note 8)	f_T	—	250	—	MHz	V_{CE} = -10V, I_E = 5mA, f = 100MHz

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	$V_{I(off)}$	-0.5 -0.5 -0.3 -0.5 -0.5	-1.1 -1.1 — — -1.1	—	V	V_{CC} = -5V, I_O = -100µA
	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	$V_{I(on)}$	—	-1.9 -1.9 — — –1.9	-3.0 -3.0 -1.4 -1.1 -3.0	V	V_O = -0.3V, I_O = -5mA V_O = -0.3V, I_O = -2mA V_O = -0.3V, I_O = -1mA V_O = -0.3V, I_O = -5mA V_O = -0.3V, I_O = -10mA
Output Voltage	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	$V_{O(on)}$	—	-0.1	-0.3	V	I_O/I_I = -10mA / -0.5mA I_O/I_I = -10mA / -0.5mA I_O/I_I = -5mA / -0.25mA I_O/I_I = -5mA / -0.25mA I_O/I_I = -10mA / -0.5mA
Input Current	DDA124EU DDA144EU DDA114YU DDA123JU DDA114EU	I_I	—	—	-0.36 -0.18 -0.88 -3.6 -0.88	mA	V_I = -5V
Output Current		$I_{O(off)}$	—	—	-0.5	µA	V_{CC} = -50V, V_I = 0
DC Current Gain	DDA124EU DDA124EUQ DDA144EU DDA114YU DDA123JU DDA114EU	G_I	56 60 68 68 80 30	—	—	—	V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -10mA V_O = -5V, I_O = -10mA V_O = -5V, I_O = -5mA
Input Resistor (R_1) Tolerance		ΔR_1	-30	—	+30	%	—
Resistance Ratio Tolerance		R_2/R_1	-20	—	+20	%	—
Gain-Bandwidth Product (Note 8)		f_T	—	250	—	MHz	V_{CE} = -10V, I_E = -5mA, f = 100MHz

Note: 8. Transistor - For Reference Only.

Typical Curves – DDA123JU (@T_A = +25°C, unless otherwise specified.)

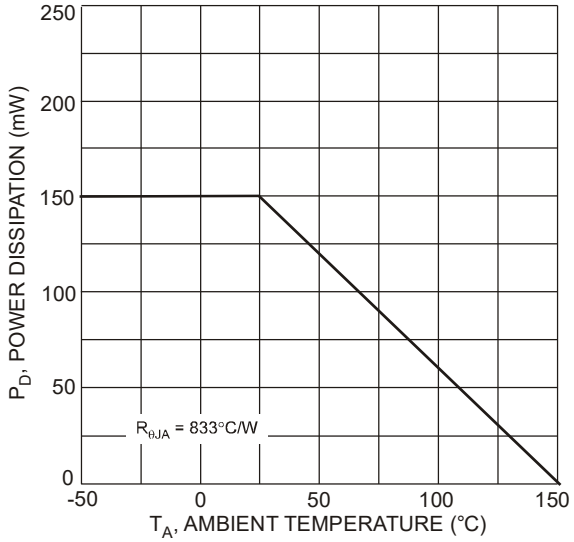

Fig. 1 Power Dissipation vs. Ambient Temperature

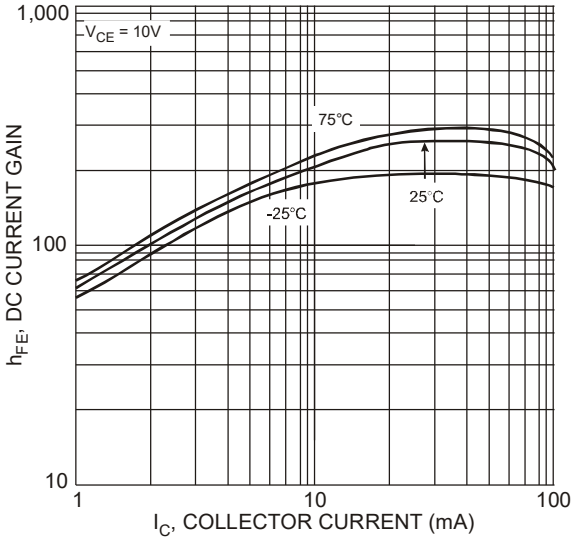

Fig. 2 Typical DC Current Gain vs. Collector Current

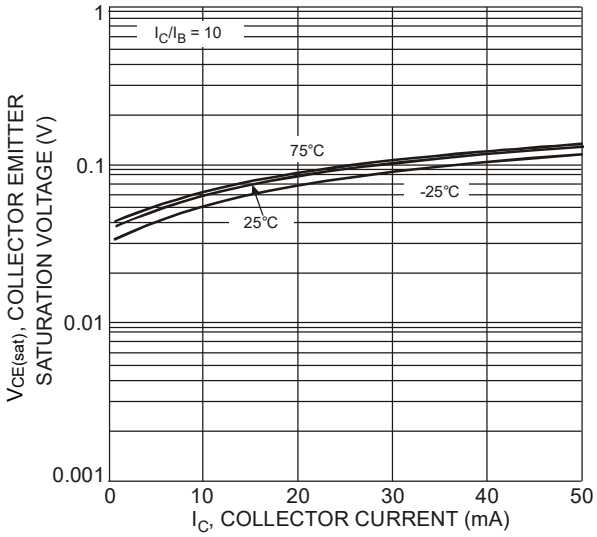

Fig. 3 Typical Collector Emitter Saturation Voltage vs. Collector Current

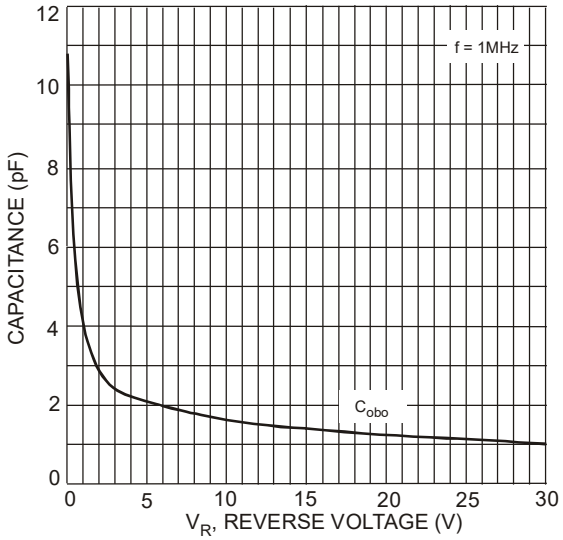

Fig. 4 Typical Capacitance Characteristics

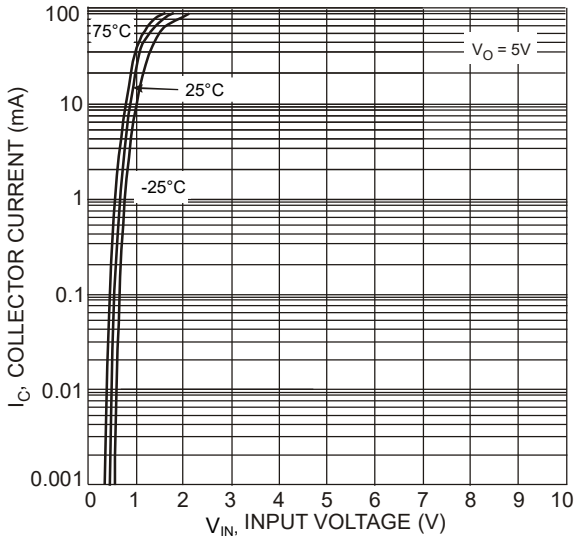

Fig. 5 Collector Current vs. Input Voltage

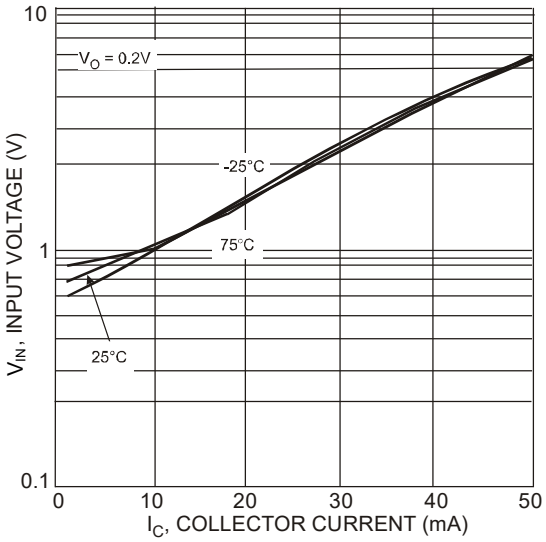

Fig. 6 Input Voltage vs. Collector Current

Typical Curves – DDA114TU (@T_A = +25°C, unless otherwise specified.)

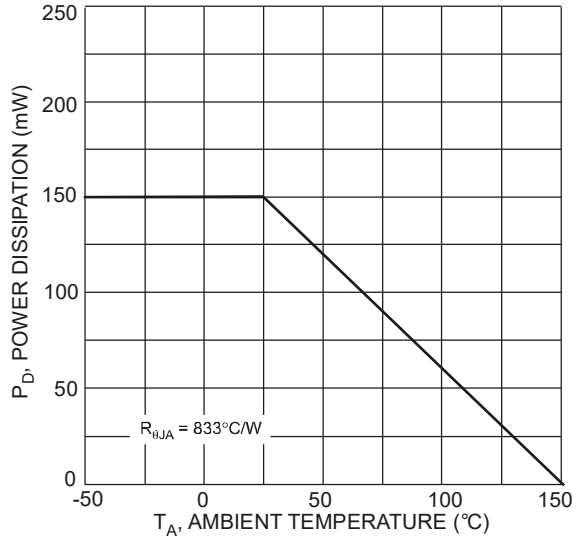

Fig.7 Power Dissipation vs. Ambient Temperature

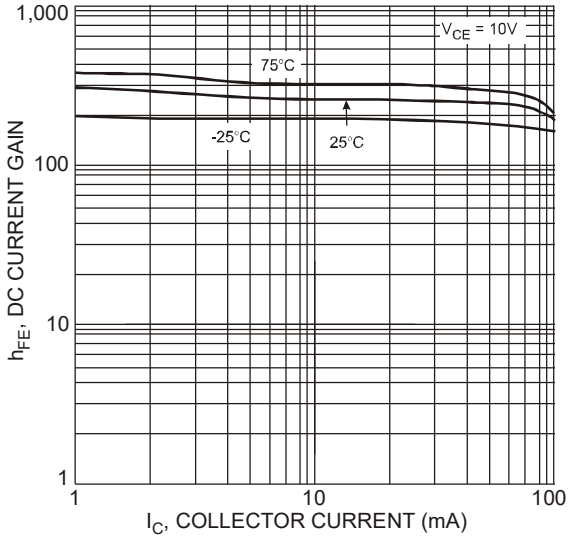

Fig.8 Typical DC Current Gain vs. Collector Current

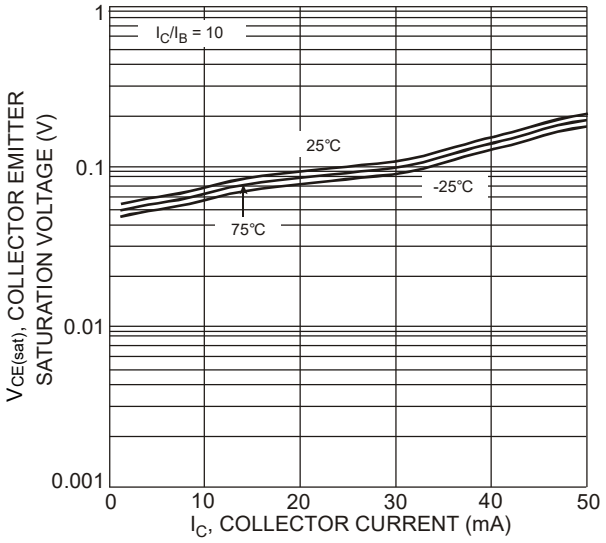

Fig.9 Typical Collector Emitter Saturation Voltage vs. Collector Current

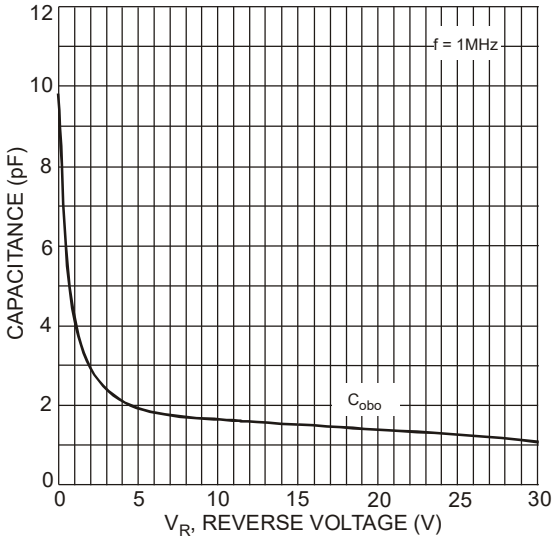

Fig.10 Typical Capacitance Characteristics

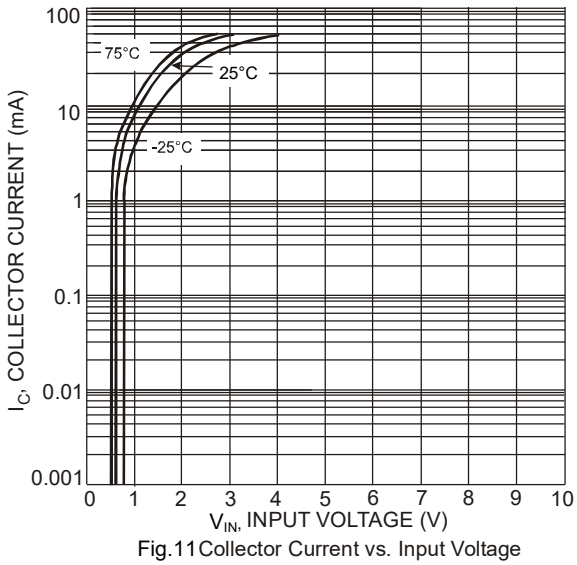

Fig.11 Collector Current vs. Input Voltage

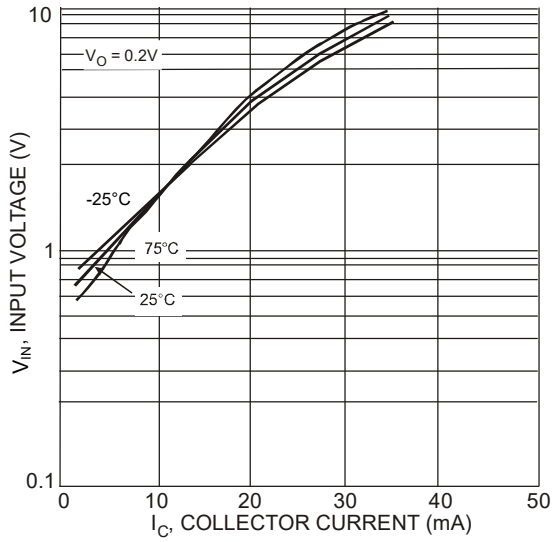

Fig.12 Input Voltage vs. Collector Current

Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT363

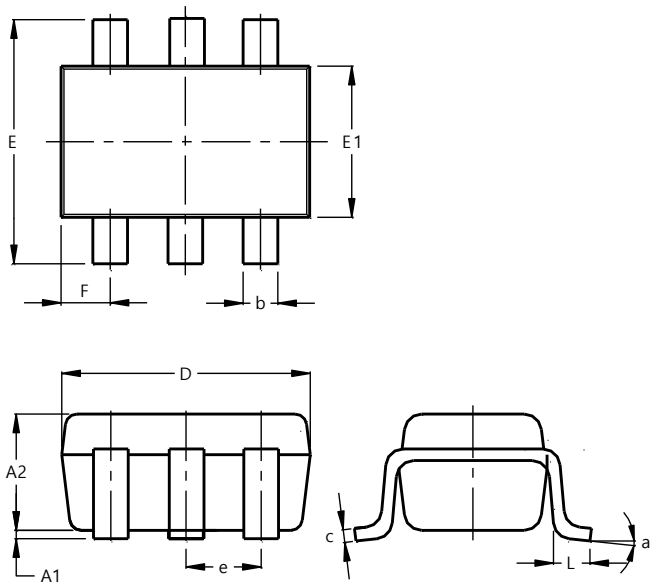

SOT363			
Dim	**Min**	**Max**	**Typ**
A1	0.00	0.10	0.05
A2	0.90	1.00	0.95
b	0.10	0.30	0.25
c	0.10	0.22	0.11
D	1.80	2.20	2.15
E	2.00	2.20	2.10
E1	1.15	1.35	1.30
e	0.650 BSC		
F	0.40	0.45	0.425
L	0.25	0.40	0.30
a	0°	8°	--
All Dimensions in mm			

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT363

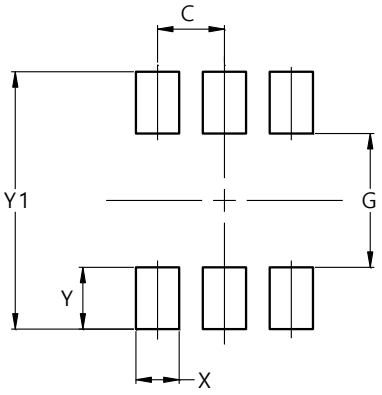

Dimensions	Value (in mm)
C	0.650
G	1.300
X	0.420
Y	0.600
Y1	2.500

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.

3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.

4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.

5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.

7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.

8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

9. This Notice may be periodically updated with the most recent version available at https://www.diodes.com/about/company/terms-and-conditions/important-notice

www.diodes.com